



**HESTORE.HU**



elektronikai alkatrész áruház

**EN:** This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QF	1

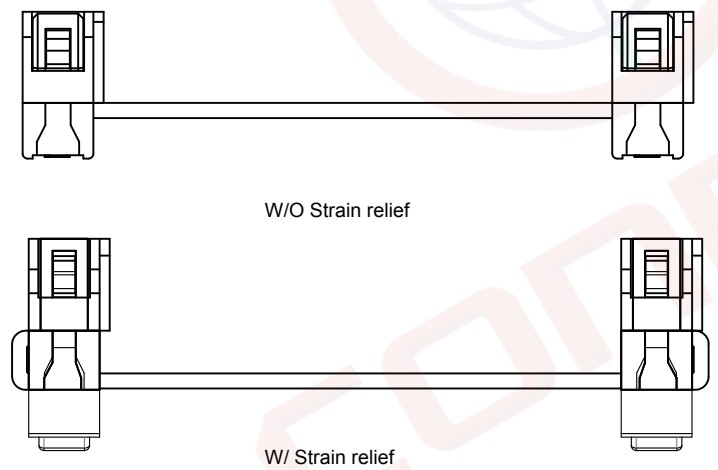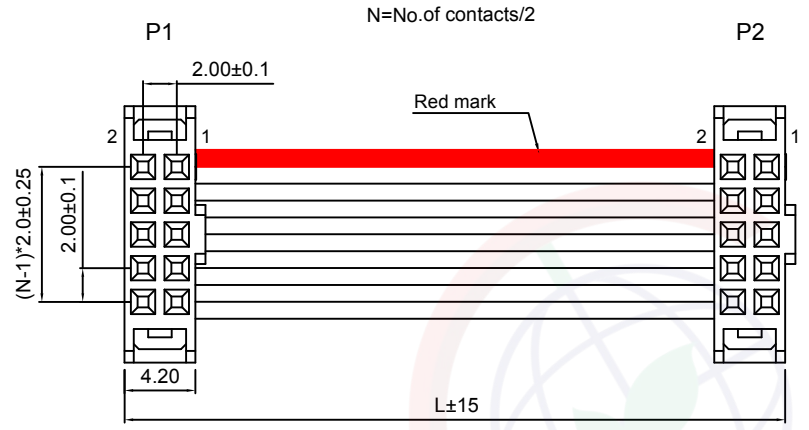

Pin Assignment	
P1	P2
1	1
2	2
3	3
.....	
X	X

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE		1:1	SHEET 1 OF 1
DRAWING NO.		C-DS1052-01-XXXXX-A	

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 03/21/23'		

Notes:  
**Specifications**  
 Contact Resistance: 500mΩ Max.  
 Insulation Resistance: 500MΩ Min.  
 Dielectric Withstanding Voltage: 300V AC(rms)  
 For 1 Minute.  
 Current Rating:0.5A.  
 Temperature: -40°C~+105°C.  
**Materials:**  
 Contact Material: Copper Alloy.  
 Contact Plating: Gold Plating Over Nickel.  
 Insulator Materials: PBT,Black.

Product Number Code:  
 DS1052-01 -XX 2 X X X A X X X  
 Cable style  
 1: Type 1  
 Length Dim L  
 0150:150mm  
 0300:300mm  
 0500:500mm  
 0600:600mm  
 .....  
 Wire diameter  
 2:Ø0.127 Red mark  
 Flat cable color  
 A: Gray  
 Strain relief  
 M:W/  
 N:W/O  
 Contact plating  
 2:Gold+Nickel  
 Housing color  
 B:Black  
 Connector Q'ty  
 2: 2 Connector (2PCS DS1017)  
 No. of contacts  
 06 08 10 12 .....

PROJECTION		TITLE	DS1052-01 (2*DS1017)	
UNITS	mm			
SHEET SIZE	A4	SERIES	DS1052-01 SERIES	

**晨翔电子有限公司**  
**CONNFLY CONNELY ELECTRONIC CO. LTD**