



**HESTORE.HU**



elektronikai alkatrész áruház

**EN:** This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).

# D TYPE



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 04/06/06'	~	LJC 04/06/06'
B	ADD DIM	LL 08/05/06'	~	LJC 04/06/06'
C	增加规格整理图面	YCH 03/15/07'	~	LJC 03/15/07'
J	整理料号	YCH 04/23/08'	~	
K	ADD P/N CODE	LJC 12/08/13'		

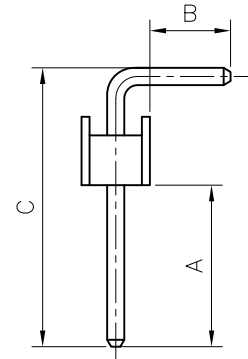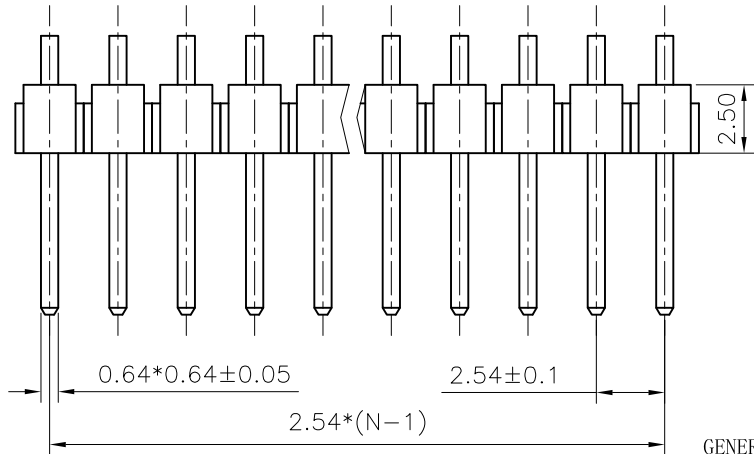

- NOTES:
- MATERIALS
    - 1.1 CONTACT MATERIAL: COPPER ALLOY.
    - 1.2 INSULATOR: PBT WITH GLASS FIBER.
  - SPECIFICATIONS
    - 2.1 CURRENT RATING: 3A.
    - 2.2 OPERATING TEMPERATURE: -40°C TO +105°C.
    - 2.3 INSULATION RESISTANCE: 1000MΩ MIN.
    - 2.4 CONTACT RESISTANCE: 20mΩ MAX.
    - 2.5 DIELECTRIC WITHSTANDING: 600 VAC.
  - PRODUCT NUMBER CODE:
    - DS1022- X X U X X - X
    - PLATING LEVEL(FOR GOLD ONLY)Ⓛ
    - 3A: 0.8-1.2u" B: LEVEL B
    - N: LEVEL N

TABLE A:

TYPE	Dimension			Pin Length (mm)	21	5.00	2.70	8.14	11.30
	A	B	C						
1	6.00	3.00	10.36	13.80					
2	6.00	4.50	9.50	14.40					
3	6.10	4.00	10.40	14.80					
4	6.00	3.20	10.50	14.10					
5	6.00	3.50	10.82	14.70					
6	4.70	1.73	8.20	10.40					
7	15.00	3.00	19.08	22.50					
8	6.00	3.10	11.10	14.40					
9	1.00	1.91	5.00	7.40					
10	6.20	3.20	11.10	14.70					
11	6.20	3.20	10.8	14.40					
12	4.50	2.93	8.00	11.40					
13	6.30	2.60	10.36	13.40					
14	5.70	2.95	9.52	12.90					
15	4.80	3.00	8.10	11.50					
16	6.00	3.00	9.14	12.60					
17	7.20	3.00	10.36	13.80					
18	3.00	6.00	7.50	13.80					
19	3.00	6.00	9.32	15.80					
20	3.50	3.00	7.86	11.30					
21					5.00	2.70	8.14	11.30	
22					8.20	2.80	12.30	15.50	
23					3.00	3.00	7.36	10.80	
24					6.50	3.00	10.36	13.80	
25					6.80	8.40	10.64	19.50	
26					10.00	3.20	14.40	18.00	
27					3.50	2.50	7.82	10.80	
28					6.00	3.00	9.50	12.90	
29					7.00	3.10	13.90	17.50	
30					4.00	3.00	8.36	11.80	
31					3.00	5.40	8.65	14.50	
32					4.50	4.50	8.82	17.80	
33					3.20	6.00	7.50	14.00	
34					3.80	6.00	8.30	14.80	
35					3.00	3.40	8.00	11.80	
36					3.80	3.00	7.93	11.20	
37					16.4	13.00	19.60	33.00	
38					6.85	3.00	10.90	14.30	
39									
40									
41									
42									

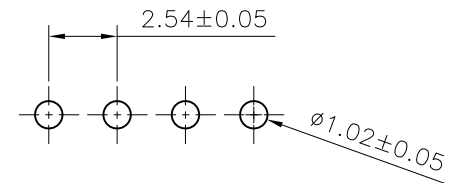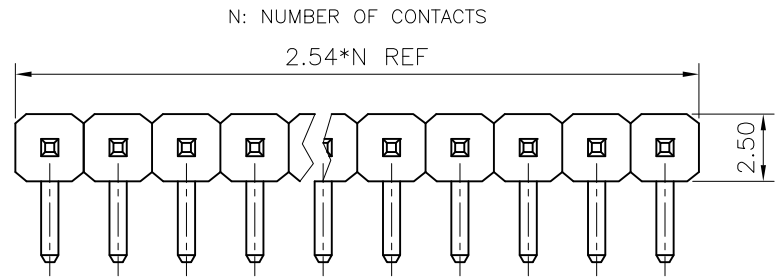

RECOMMEND P.C.BOARD LAYOUT

A/B/C: CUSTOMER LENGTH AVAILABLE

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	2.54mm PIN HEADER R/A TYPE
X.	±0.60	X.	±5°	UNITS	mm	SINGLE ROW D TYPE	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1022 SERIES
.XX	±0.25	.XX	±2°	<b>晨翔电子有限公司</b> <b>CONNFLY® CONNFLY ELECTRONIC CO., LTD</b>			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.		C-DS1022-1*XXDXX-X-K					