



HESTORE.HU

elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.




Please visit our website for pricing and availability at www.hestore.hu.



东莞市宏聚电子五金制品有限公司



HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

MR-1

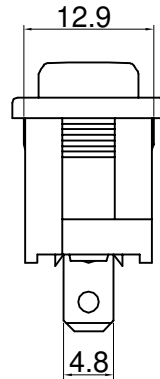

Rating: 10A 125V AC (UL CUL)
 6A 250V AC (CQC ENEC VDE)
 Contact Resistance: 50mΩ Max
 Insulation Resistance: DC 500V 100MΩ Min
 Dielectric Strength: AC1500V 1 minute
 Electrical life: 10,000 cycles
 Operating Temperature: 0°C~85°C

CUT-OUT



| | | |
|-----------|----------|----------|
| | X | Y |
| 0.75~1.25 | 19.2-0.1 | 13.0+0.1 |
| 1.25~2.00 | 19.4-0.1 | 13.0+0.1 |
| 2.00~3.00 | 19.8-0.1 | 13.0+0.1 |

MATERIAL:

Body:Nylon66,UL rated:94V-2 min
 Actuator:Nylon66,UL rated:94V-2 min
 Terminal:Brass,silver or tin plated

| | | | | | | | | | | | | | | | | | |
|------|---|-----------|---|---|---|---------------|---|---|---|---|---|---|---|---|--------|---|---|
| 0 | 1 | 2 | 3 | 4 | 5 | 7 | 8 | 9 | A | B | C | D | E | G | H | J | L |
| None | | ON OFF | | | | ON/开 OFF/关 | | | | | | | | | 开 关 | | |

| | | | | | | | | | | | | | | | | | |
|---------|-------------------------|--|--|---------------|---------|-------------|------------|-----------|------------|------------------------|--|------|--|---------------------------|--|--|--|
| | | | | 公差 TOLERANCES | | .X± 0.3 | | .XX± 0.15 | | 角度 ANGLE | | ± 1° | | 单位 DIMENSION UNIT mm. | | | |
| | | | | 版本 VERSION | A1 | 比例尺 SCALE | NONE | 日期 DATE | 2014.07.17 | 品名 TITLE | | | | 图号 DRAWING NO | | | |
| A1 | 重新整理后发行 | | | 2014.07.17 | N/A | 核准 | 核对 | 绘图 | | MR-1-118-CXL-BRAAE-220 | | | | MR-1-118-CXL-BRAAE-220_A1 | | | |
| 版本 VER. | 变更说明 CHANGE DESCRIPTION | | | 日期 DATE | ECN NO. | APPROVED BY | CHECKED BY | DRAWN BY | | | | | | | | | |

File Code: HJ-WI-E-03A