



HESTORE.HU
elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

LD-BZEN-1201




LD-BZEN-1201


Type	Unit	LD-BZEN-1201
Rated Voltage	V	1.5
Operating Voltage	V	1-2
*Rated Current(MAX)	mA	30
*Min Sound Output at 10 cm	dB	80
Coil Resistance	Ω	16 \pm 4
*Resonant Frequency	Hz	2400
Operating Temperature	$^{\circ}$ C	-20 - +70
Storage Temperature	$^{\circ}$ C	-30 - +80
Housing Material		NORYL
Weight	g	2

*Value Applying at Rated Voltage (resonant frequency, 1/2 duty, square wave)

FREQUENCY RESPONSE:

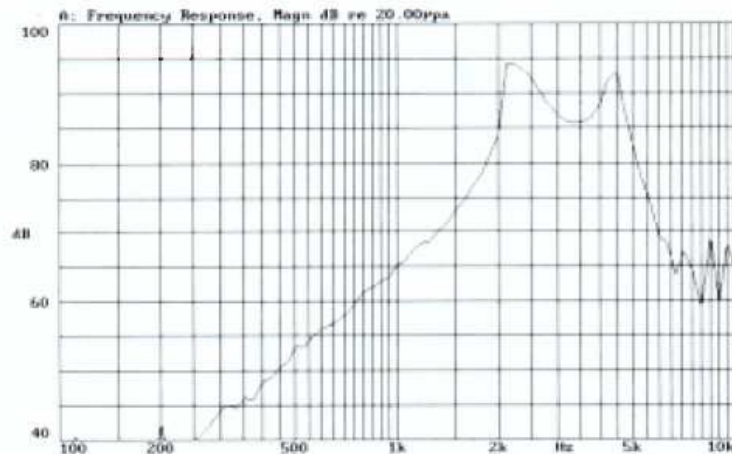

DIMENSIONS:

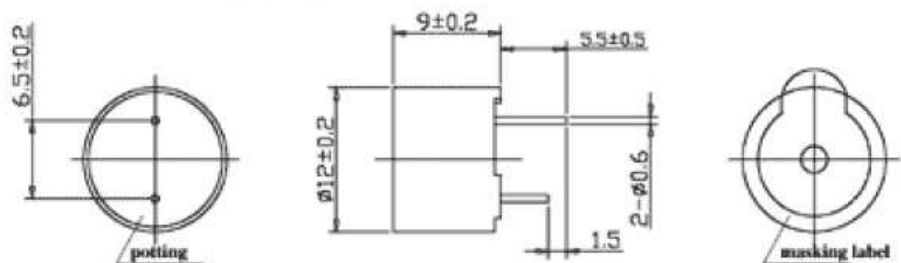

UNIT:mm
Tolerance: \pm 0.5mm
Wave Solderable and Washable