






HESTORE.HU

elektronikai alkatrész áruház


EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 06/22/05'		

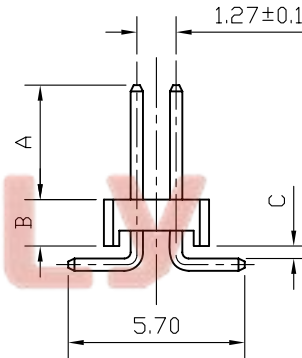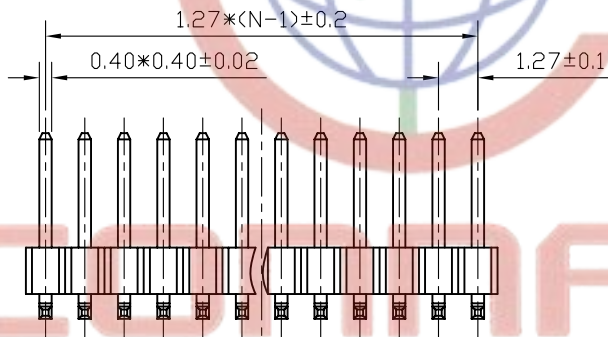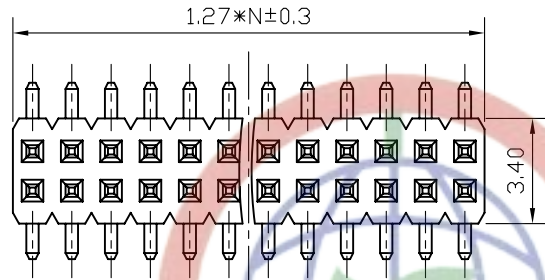

N:NUMBER OF CONTACTS/2

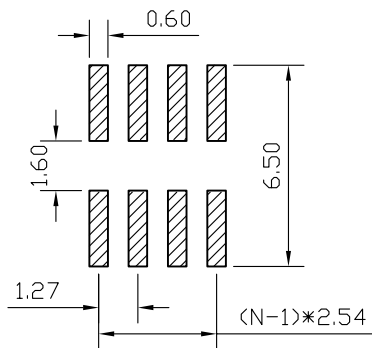


RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

TYPE	DIM A	DIM C
1	3.70	0.40
2	3.00	0.40
3	3.30	0.20
4	3.30	0.40
5		

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 50mΩ Max. INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE: 300V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 - OPERATING TEMPERATURE: -40°C~+105°C.
- PART NUMBER: DS1031-08
- PRODUCT NUMBER CODE:

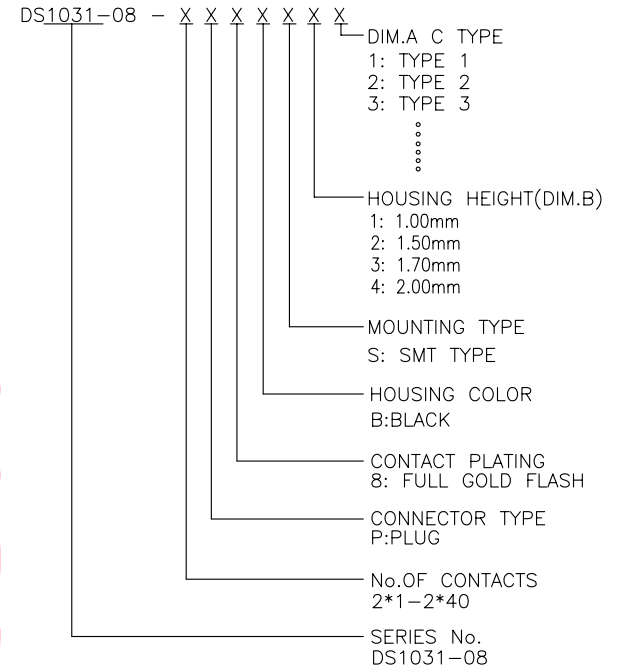

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	
X.	±0.60	X.	±5'		PIN HEADER PITCH 1.27mm SMT TYPE	
.X	±0.38	.X	±3'	mm		
.XX	±0.25	.XX	±2'	SHEET SIZE	A4	
DRAWING TYPE				CUSTOMER	SERIES	DS1031-08 SERIES
SCALE		1:1	SHEET	1 OF 1		
DRAWING NO.		C-DS1031-08-XXXXXXX				



晨翔电子有限公司

CONFLY CONFLY ELECTRONIC CO. LTD