



**HESTORE.HU**

elektronikai alkatrész áruház

**EN:** This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).

## SP 1.2 series


### Characteristic

SP 1.2 single turn potentiometers are enclosed in a non-corrosive metal housing, with carbon resistive element. Elements have a linear characteristic of regulation. SP 1.2 series potentiometers have a ring terminals for wire soldering. Potentiometers with 5% and 10% resistance tolerance are available on request.



Parameter	Value
Nominal resistance	E6 series
Range of available resistances	470Ω ... 4,7MΩ
Resistance tolerance	R ≤ 220 kΩ ±20% R > 220 kΩ ±30%
Max. dissipation power P <sub>n</sub> (T = 40°C)	2 W
Max. operating voltage	500 V
Mechanical rotation angle	255° ±5°
Temperature coefficient of resistance (TCR)	±20x10 <sup>-4</sup>
Climatic category	65/100/04

### Dimensions

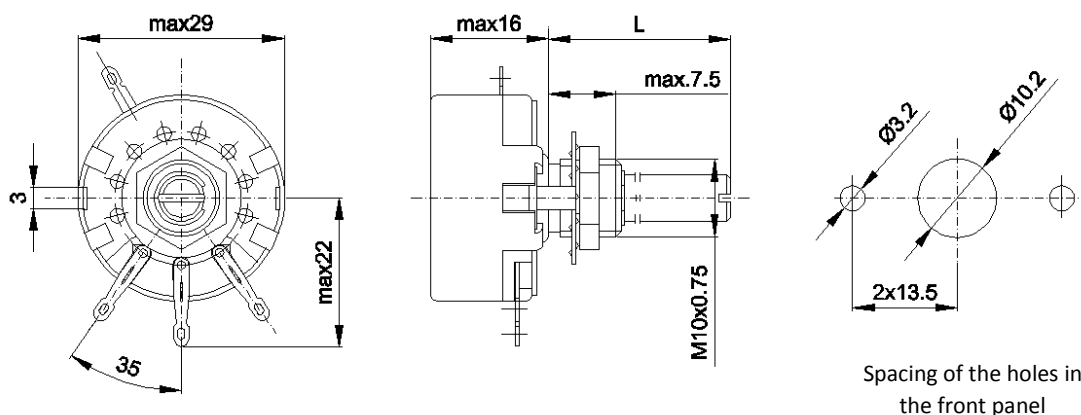

### TELPOD S.A.

str. Pilsudskiego 63A  
32-050 Skawina  
[www.telpod.pl](http://www.telpod.pl)

Technical division: +48 (0)12 257 10 12  
Sales division: +48 (0)12 257 10 35  
fax: +48 (0)12 257 10 13  
e-mail: [potentiometer@telpod.pl](mailto:potentiometer@telpod.pl)

date: 04 / 2015  
Copyright 2015 by Telpod

## SP 1.2 series

### Shaft types

Type	Length L [mm]
P1	16; 20; 25; 32; 50; 60
P3	16; 20

