



HESTORE.HU

elektronikai alkatrész áruház




EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.



FERROXCUBE



1 2 3 4

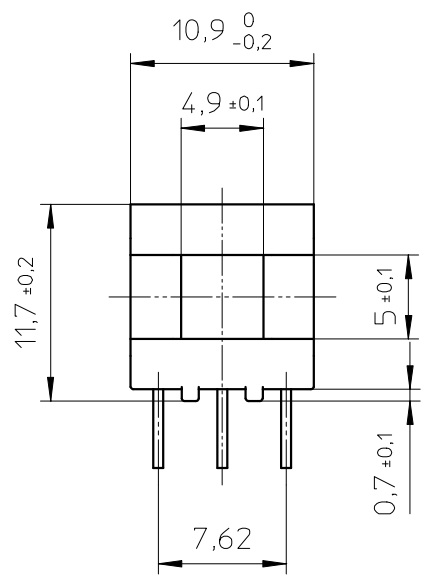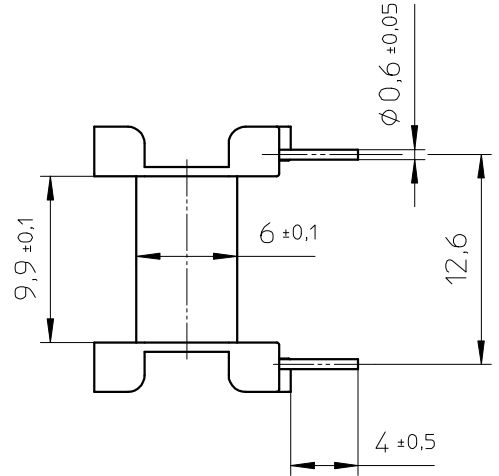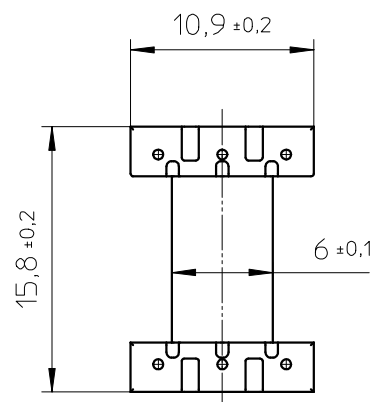

Hole pattern:

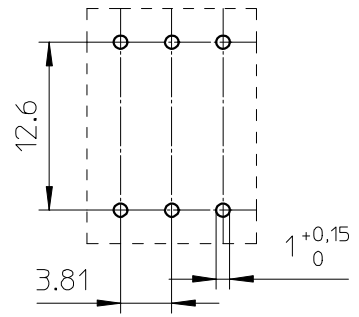

Coil former material: Sumikon PM-9820 (PF), glass-reinforced.
 UL file number: E41429 - UL94V-0.
 Pin material: Copper-clad steel, Sn plated.
 Max. operating temp.: acc. to IEC 60 085 class H, 180°C.
 Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5s
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s
 Min. winding area: 22.5 mm²
 Mean length of turn: 33.9 mm.

CLASSNO.		CSH-E16/8/5-1S-6P-C		4322 021 04071		2002-03-28
						2003-08-13
						2003-08-13
						2005-03-11
NAME NAAM	Tjon	SUPERS. VERV.		1 SH BL.	SH BL.	112 - 001 010
MPA	CHECK CONTR.	DAT.	02-03-28	Property of Eigendom van		© FERROXCUBE 2000
						A4