





**HESTORE.HU**




elektronikai alkatrész áruház

**EN:** This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).

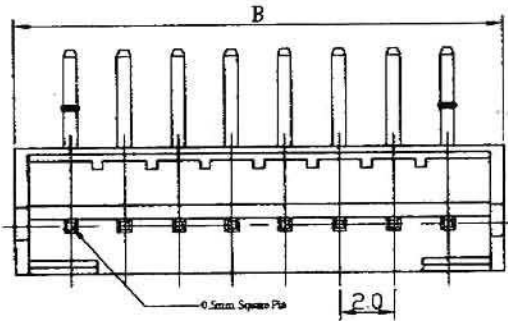

RECOMMENDED P.C. BOARD HOLE DIMM.

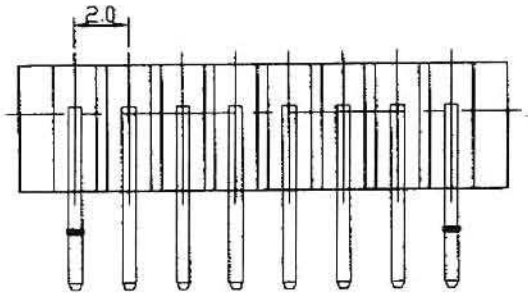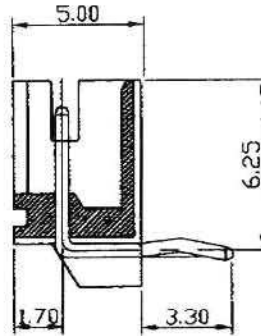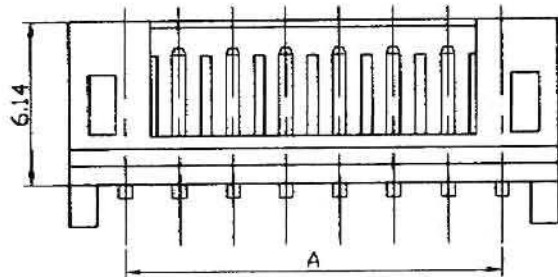

### Specifications

#### Electrical

Voltage Rating: 100V(AC)  
 Current Rating: 2A  
 Contact Resistance: 20m  $\Omega$  max.  
 Dielectric Withstanding Voltage: 800V AC/1min.  
 Insulation Resistance: 1000M  $\Omega$  min.

#### Material

Circuits: 2~16  
 Insulator: Nylon 66 UL 94V-0  
 Color: White or Natural  
 Contact: Brass 0.50mm(0.20") Square Wire Pins  
 Plating: Tin or Gold Plated  
 Temperature Range: -25°C~+85°C  
 Applicable PC Board Thickness: 0.8 to 1.6mm

Poles	Dimension mm (in.)		Note.
	A	B	
2	2.0(0.079)	6.04(0.237)	
3	4.0(0.157)	8.04(0.316)	
4	6.0(0.236)	10.04(0.395)	
5	8.0(0.315)	12.04(0.473)	
6	10.0(0.394)	14.06(0.473)	
7	12.0(0.472)	16.06(0.631)	
8	14.0(0.551)	18.08(0.711)	
9	16.0(0.630)	20.08(0.790)	
10	18.0(0.709)	22.10(0.870)	
11	20.0(0.787)	24.10(0.949)	
12	22.0(0.886)	26.12(1.027)	
13	24.0(0.945)	28.12(1.106)	
14	26.0(1.024)	30.14(1.203)	
15	28.0(1.102)	32.14(1.283)	
16	30.0(1.181)	34.14(1.363)	

Gold Star Connectors Co., Ltd.

制表日: 2005/09/15

DRAWING.

Kevin

APPROVED

APPD.

CKD.

TOLERANCE

PART NO.

NCW200S-xxR

REV.

A