



HESTORE.HU


elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

Ninigi


D A T A S H E E T

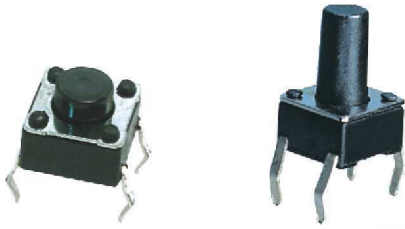

Specification:

- 1) Rating: 12 VDC, 50 mA
- 2) Travel: 0.25 ± 0.1 mm
- 3) Contact resistance: 100 m max.

TACT-64K

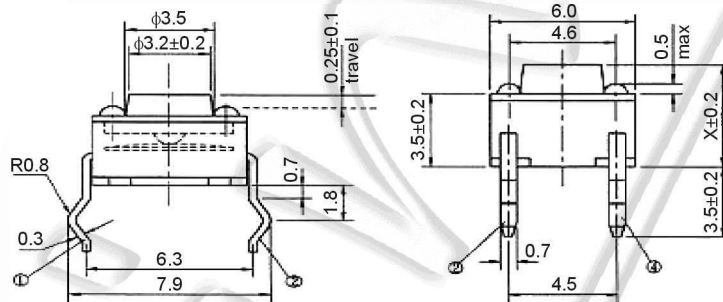

OPERATING FORCE

K	100±30 gf
V	130±30 gf
N	160±50 gf
W	170±50 gf
Y	190±30 gf
R	250±100 gf
M	350±100 gf

BUTTON HEIGHT

4	X=4.3 mm
5	X=5 mm
7	X=7 mm
73	X=7.3 mm
8	X=8 mm
85	X=8.5 mm
9	X=9.5 mm
12	X=12.5 mm
13	X=13.0 mm
14	X=13.5 mm
17	X=17 mm

CIRCUIT DIAGRAM

