



**HESTORE.HU**

elektronikai alkatrész áruház

**EN:** This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).

# SN54LS240, SN54LS241, SN54LS244, SN54S240, SN54S241, SN54S244 SN74LS240, SN74LS241, SN74LS244, SN74S240, SN74S241, SN74S244 OCTAL BUFFERS AND LINE DRIVERS WITH 3-STATE OUTPUTS


SDLS144C – APRIL 1985 – REVISED MAY 2010

- 3-State Outputs Drive Bus Lines or Buffer Memory Address Registers
- PNP Inputs Reduce DC Loading
- Hysteresis at Inputs Improves Noise Margins

## description


These octal buffers and line drivers are designed specifically to improve both the performance and density of three-state memory address drivers, clock drivers, and bus-oriented receivers and transmitters. The designer has a choice of selected combinations of inverting and noninverting outputs, symmetrical, active-low output-control ( $\overline{G}$ ) inputs, and complementary output-control ( $G$  and  $\overline{G}$ ) inputs. These devices feature high fan-out, improved fan-in, and 400-mV noise margin. The SN74LS' and SN74S' devices can be used to drive terminated lines down to 133  $\Omega$ .

SN54LS', SN54S' ... J OR W PACKAGE  
SN74LS240, SN74LS244 ... DB, DW, N, OR NS PACKAGE  
SN74LS241 ... DW, N, OR NS PACKAGE  
SN74S' ... DW OR N PACKAGE

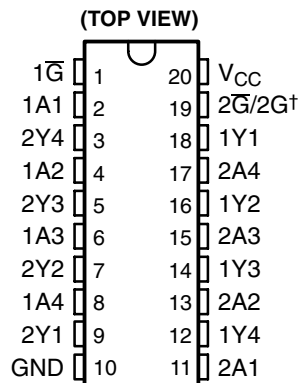

† 2G for 'LS241 and 'S241 or  $2\overline{G}$  for all other drivers.

SN54LS', SN54S' ... FK PACKAGE  
(TOP VIEW)

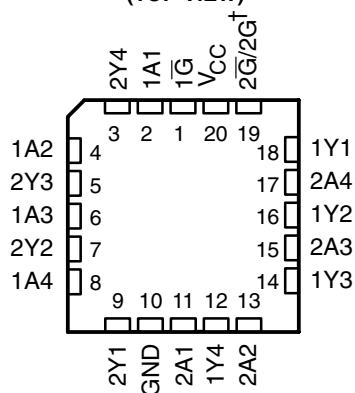

† 2G for 'LS241 and 'S241 or  $2\overline{G}$  for all other drivers.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

 **TEXAS  
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 2010, Texas Instruments Incorporated  
On products compliant to MIL-PRF-38535, all parameters are tested unless otherwise noted. On all other products, production processing does not necessarily include testing of all parameters.

**SN54LS240, SN54LS241, SN54LS244, SN54S240, SN54S241, SN54S244  
 SN74LS240, SN74LS241, SN74LS244, SN74S240, SN74S241, SN74S244  
 OCTAL BUFFERS AND LINE DRIVERS WITH 3-STATE OUTPUTS**

SDLS144C – APRIL 1985 – REVISED MAY 2010

**ORDERING INFORMATION†**

| <b>T<sub>A</sub></b> | <b>PACKAGE‡</b> |               | <b>ORDERABLE PART NUMBER</b> | <b>TOP-SIDE MARKING</b> |
|----------------------|-----------------|---------------|------------------------------|-------------------------|
| 0°C to 70°C          | PDIP – N        | Tube          | SN74LS240N                   | SN74LS240N              |
|                      |                 |               | SN74LS241N                   | SN74LS241N              |
|                      |                 |               | SN74LS244N                   | SN74LS244N              |
|                      |                 |               | SN74S240N                    | SN74S240N               |
|                      |                 |               | SN74S241N                    | SN74S241N               |
|                      |                 |               | SN74S244N                    | SN74S244N               |
|                      | SOIC – DW       | Tube          | SN74LS240DW                  | LS240                   |
|                      |                 | Tape and reel | SN74LS240DWR                 |                         |
|                      |                 | Tube          | SN74LS241DW                  | LS241                   |
|                      |                 | Tape and reel | SN74LS241DWR                 |                         |
|                      |                 | Tube          | SN74LS244DW                  | LS244                   |
|                      |                 | Tape and reel | SN74LS244DWR                 |                         |
|                      |                 | Tube          | SN74S240DW                   | S240                    |
|                      |                 | Tape and reel | SN74S240DWR                  |                         |
|                      |                 | Tube          | SN74S241DW                   | S241                    |
|                      |                 | Tape and reel | SN74S241DWR                  |                         |
|                      |                 | Tube          | SN74S244DW                   | S244                    |
|                      |                 | Tape and reel | SN74S244DWR                  |                         |
|                      | SOP – NS        | Tape and reel | SN74LS240NSR                 | 74LS240                 |
|                      |                 |               | SN74LS241NSR                 | 74LS241                 |
|                      |                 |               | SN74LS244NSR                 | 74LS244                 |
|                      | SSOP – DB       | Tape and reel | SN74LS240DBR                 | LS240                   |
|                      |                 |               | SN74LS244DBR                 | LS244                   |

† For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI web site at [www.ti.com](http://www.ti.com).

‡ Package drawings, thermal data, and symbolization are available at [www.ti.com/packaging](http://www.ti.com/packaging).



**SN54LS240, SN54LS241, SN54LS244, SN54S240, SN54S241, SN54S244  
SN74LS240, SN74LS241, SN74LS244, SN74S240, SN74S241, SN74S244  
OCTAL BUFFERS AND LINE DRIVERS WITH 3-STATE OUTPUTS**

SDLS144C – APRIL 1985 – REVISED MAY 2010

**ORDERING INFORMATION† (CONTINUED)**

| <b>T<sub>A</sub></b> | <b>PACKAGE‡</b> |      | <b>ORDERABLE PART NUMBER</b> | <b>TOP-SIDE MARKING</b> |
|----------------------|-----------------|------|------------------------------|-------------------------|
| -55°C to 125°C       | CDIP – J        | Tube | SN54LS240J                   | SN54LS240J              |
|                      |                 |      | SNJ54LS240J                  | SNJ54LS240J             |
|                      |                 |      | SN54LS241J                   | SN54LS241J              |
|                      |                 |      | SNJ54LS241J                  | SNJ54LS241J             |
|                      |                 |      | SN54LS244J                   | SN54LS244J              |
|                      |                 |      | SNJ54LS244J                  | SNJ54LS244J             |
|                      |                 |      | SN54S240J                    | SN54S240J               |
|                      |                 |      | SNJ54S240J                   | SNJ54S240J              |
|                      |                 |      | SN54S241J                    | SN54S241J               |
|                      |                 |      | SNJ54S241J                   | SNJ54S241J              |
|                      |                 |      | SN54S244J                    | SN54S244J               |
|                      |                 |      | SNJ54S244J                   | SNJ54S244J              |
|                      | CFP – W         | Tube | SNJ54LS240W                  | SNJ54LS240W             |
|                      |                 |      | SNJ54LS241W                  | SNJ54LS241W             |
|                      |                 |      | SNJ54LS244W                  | SNJ54LS244W             |
|                      |                 |      | SNJ54S240W                   | SNJ54S240W              |
|                      |                 |      | SNJ54S241W                   | SNJ54S241W              |
|                      |                 |      | SNJ54S244W                   | SNJ54S244W              |
|                      | LCCC – FK       | Tube | SNJ54LS240FK                 | SNJ54LS240FK            |
|                      |                 |      | SNJ54LS241FK                 | SNJ54LS241FK            |
|                      |                 |      | SNJ54LS244FK                 | SNJ54LS244FK            |
|                      |                 |      | SNJ54S240FK                  | SNJ54S240FK             |
|                      |                 |      | SNJ54S241FK                  | SNJ54S241FK             |
|                      |                 |      | SNJ54S244FK                  | SNJ54S244FK             |



† For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI web site at [www.ti.com](http://www.ti.com).

‡ Package drawings, thermal data, and symbolization are available at [www.ti.com/packaging](http://www.ti.com/packaging).

**SN54LS240, SN54LS241, SN54LS244, SN54S240, SN54S241, SN54S244  
 SN74LS240, SN74LS241, SN74LS244, SN74S240, SN74S241, SN74S244  
 OCTAL BUFFERS AND LINE DRIVERS WITH 3-STATE OUTPUTS**

SDLS144C - APRIL 1985 - REVISED MAY 2010


**schematics of inputs and outputs**

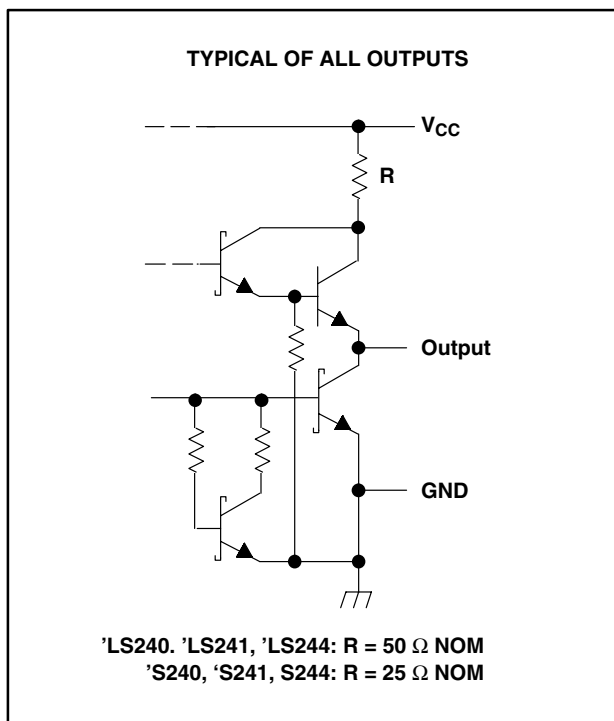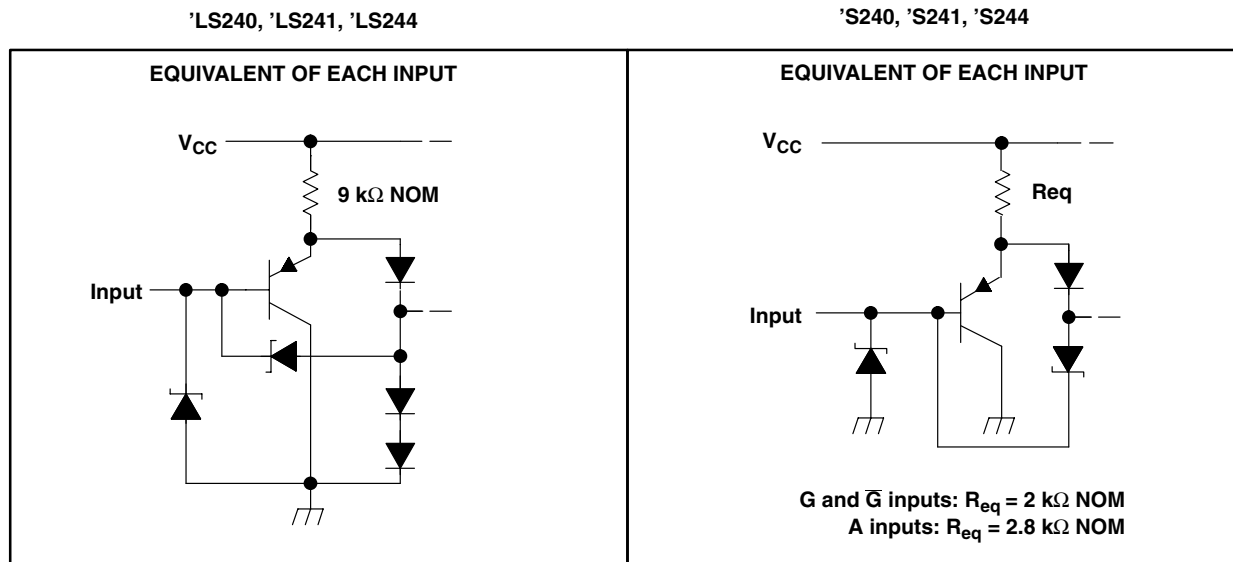

**SN54LS240, SN54LS241, SN54LS244, SN54S240, SN54S241, SN54S244  
SN74LS240, SN74LS241, SN74LS244, SN74S240, SN74S241, SN74S244  
OCTAL BUFFERS AND LINE DRIVERS WITH 3-STATE OUTPUTS**

SDL144C – APRIL 1985 – REVISED MAY 2010

**logic diagram**

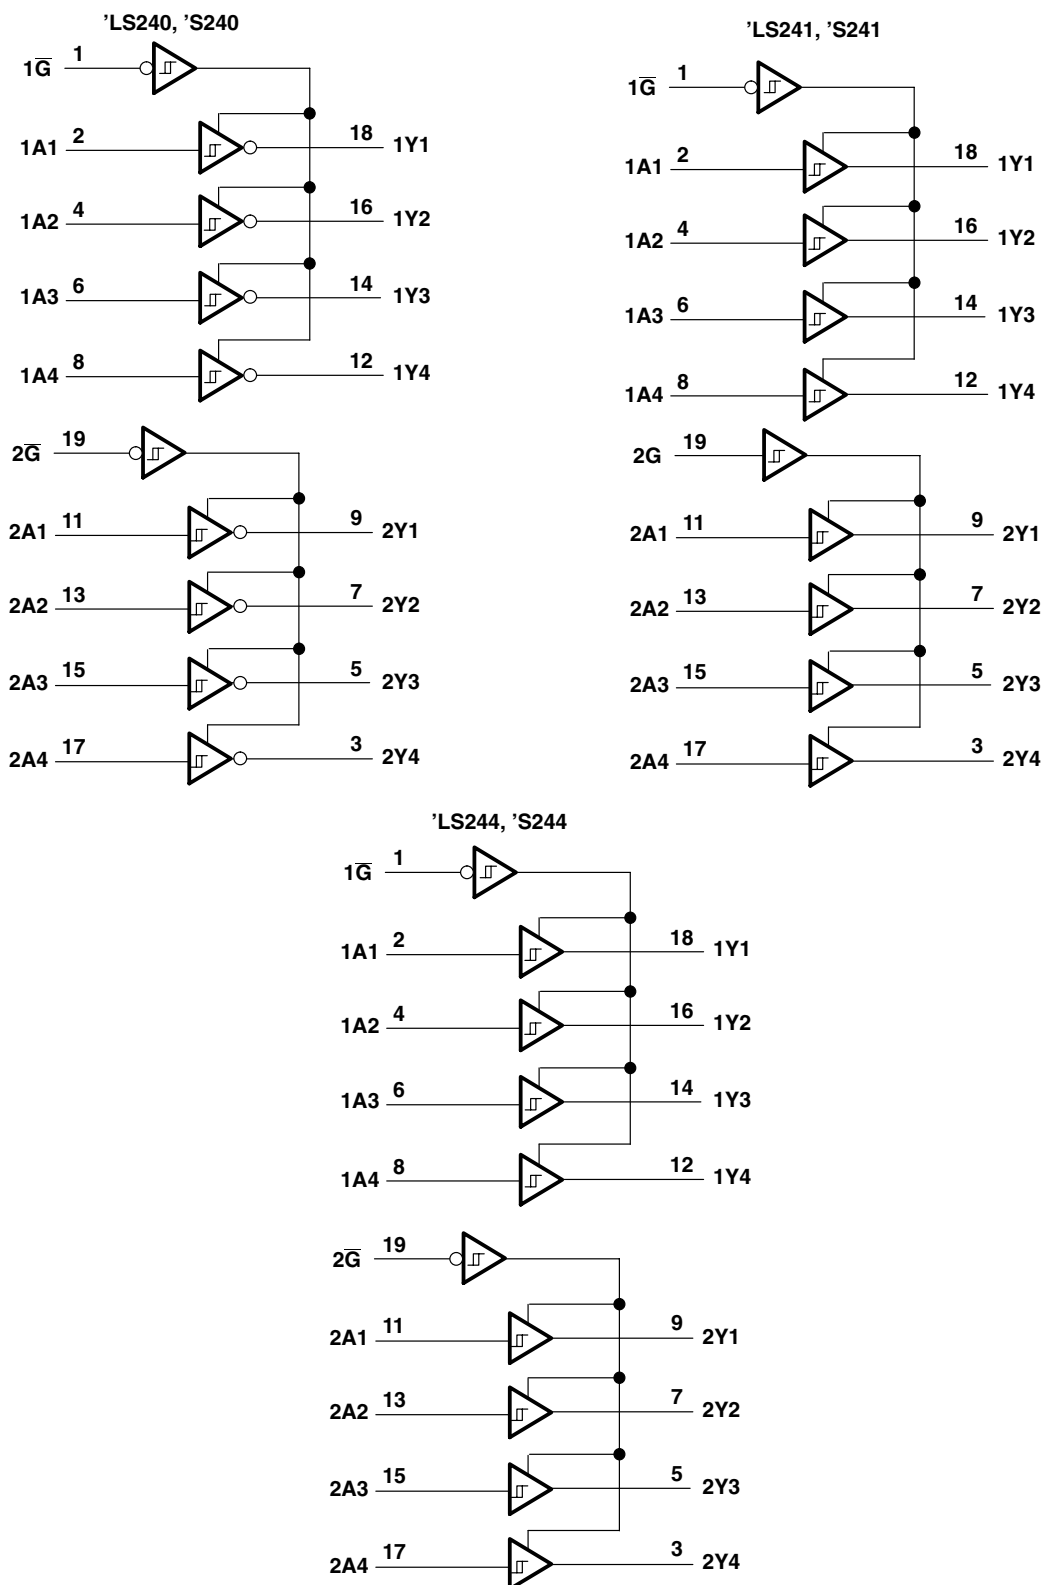

Pin numbers shown are for DB, DW, J, N, NS, and W packages.



**SN54LS240, SN54LS241, SN54LS244, SN54S240, SN54S241, SN54S244  
 SN74LS240, SN74LS241, SN74LS244, SN74S240, SN74S241, SN74S244  
 OCTAL BUFFERS AND LINE DRIVERS WITH 3-STATE OUTPUTS**

SDLS144C – APRIL 1985 – REVISED MAY 2010

**absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†**

|   |                |
|---|----------------|
| Supply voltage, $V_{CC}$ (see Note 1)                             | 7 V            |
| Input voltage, $V_I$ : 'LS  | 7 V            |
| 'S  | 5.5 V          |
| Off-state output voltage  | 5.5 V          |
| Package thermal impedance, $\theta_{JA}$ (see Note 2): DB package | 70°C/W         |
| DW package  | 58°C/W         |
| N package   | 69°C/W         |
| NS package  | 60°C/W         |
| Storage temperature range, $T_{stg}$                              | -65°C to 150°C |

† Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES: 1. Voltage values are with respect to network ground terminal.  
 2. The package thermal impedance is calculated in accordance with JESD 51-7.

**recommended operating conditions**

|                                      | SN54LS' |     |     | SN74LS' |     |      | UNIT |
|--------------------------------------|---------|-----|-----|---------|-----|------|------|
|                                      | MIN     | NOM | MAX | MIN     | NOM | MAX  |      |
| $V_{CC}$ Supply voltage (see Note 1) | 4.5     | 5   | 5.5 | 4.75    | 5   | 5.25 | V    |
| $V_{IH}$ High-level input voltage    | 2       |     |     | 2       |     |      | V    |
| $V_{IL}$ Low-level input voltage     |         |     | 0.7 |         |     | 0.8  | V    |
| $I_{OH}$ High-level output current   |         |     | -12 |         |     | -15  | mA   |
| $I_{OL}$ Low-level output current    |         |     | 12  |         |     | 24   | mA   |
| $T_A$ Operating free-air temperature | -55     |     | 125 | 0       |     | 70   | °C   |

NOTE 1: Voltage values are with respect to network ground terminal.



**SN54LS240, SN54LS241, SN54LS244, SN54S240, SN54S241, SN54S244  
SN74LS240, SN74LS241, SN74LS244, SN74S240, SN74S241, SN74S244  
OCTAL BUFFERS AND LINE DRIVERS WITH 3-STATE OUTPUTS**

SDLS144C – APRIL 1985 – REVISED MAY 2010

**electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)**

| PARAMETER                           | TEST CONDITIONS†                                    |  | SN54LS'                  |      | SN74LS' |      | UNIT          |
|-------------------------------------|---|--|--------------------------|------|---------|------|---------------|
|                                     |   |  | MIN                      | TYP‡ | MAX     | MIN  |               |
| $V_{IK}$                            | $V_{CC} = \text{MIN}$ ,                             | $I_I = -18 \text{ mA}$                                 |                          |      | -1.5    |      | V             |
| Hysteresis<br>( $V_{T+} - V_{T-}$ ) | $V_{CC} = \text{MIN}$                               |  | 0.2                      | 0.4  | 0.2     | 0.4  | V             |
| $V_{OH}$                            | $V_{CC} = \text{MIN}$ ,<br>$I_{OH} = -3 \text{ mA}$ | $V_{IH} = 2 \text{ V}$ ,<br>$V_{IL} = \text{MAX}$ ,    | 2.4                      | 3.4  | 2.4     | 3.4  | V             |
|                                     | $V_{CC} = \text{MIN}$ ,<br>$I_{OH} = \text{MAX}$    | $V_{IH} = 2 \text{ V}$ ,<br>$V_{IL} = 0.5 \text{ V}$ , | 2                        |      | 2       |      |               |
| $V_{OL}$                            | $V_{CC} = \text{MIN}$ ,<br>$V_{IL} = \text{MAX}$    | $V_{IH} = 2 \text{ V}$ ,                               | $I_{OL} = 12 \text{ mA}$ |      | 0.4     |      | V             |
|                                     |   |  | $I_{OL} = 24 \text{ mA}$ |      | 0.5     |      |               |
| $I_{OZH}$                           | $V_{CC} = \text{MAX}$ ,<br>$V_{IL} = \text{MAX}$    | $V_{IH} = 2 \text{ V}$ ,                               | $V_O = 2.7 \text{ V}$    |      | 20      |      | $\mu\text{A}$ |
| $I_{OZL}$                           | $V_{CC} = \text{MAX}$ ,<br>$V_{IL} = \text{MAX}$    | $V_{IH} = 2 \text{ V}$ ,                               | $V_O = 0.4 \text{ V}$    |      | -20     |      | $\mu\text{A}$ |
| $I_I$                               | $V_{CC} = \text{MAX}$ ,                             | $V_I = 7 \text{ V}$                                    |                          |      | 0.1     |      | mA            |
| $I_{IH}$                            | $V_{CC} = \text{MAX}$ ,                             | $V_I = 2.7 \text{ V}$                                  |                          |      | 20      |      | $\mu\text{A}$ |
| $I_{IL}$                            | $V_{CC} = \text{MAX}$ ,                             | $V_{IL} = 0.4 \text{ V}$                               |                          |      | -0.2    |      | mA            |
| $I_{OS}§$                           | $V_{CC} = \text{MAX}$ ,                             |  | -40                      | -225 | -40     | -225 | mA            |
| $I_{CC}$                            | $V_{CC} = \text{MAX}$ ,<br>Output open              | Outputs high   | All                      |      | 17      | 27   | mA            |
|                                     |   | Outputs low  | 'LS240                   |      | 26      | 44   |               |
|                                     |   |  | 'LS241, 'LS244           |      | 27      | 46   |               |
|                                     |   | Outputs disabled                                       | 'LS240                   |      | 29      | 50   |               |
| 'LS241, 'LS244                      |   |  | 32                       | 54   |         |      |               |

† For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡ All typical values are at  $V_{CC} = 5 \text{ V}$ ,  $T_A = 25^\circ\text{C}$ .

§ Not more than one output should be shorted at a time, and duration of the short-circuit should not exceed one second.

**switching characteristics,  $V_{CC} = 5 \text{ V}$ ,  $T_A = 25^\circ\text{C}$  (see Figure 1)**

| PARAMETER | TEST CONDITIONS      |                       | 'LS240 |     | 'LS241, 'LS244 |     | UNIT |
|-----------|----------------------|-----------------------|--------|-----|----------------|-----|------|
|           |                      |                       | MIN    | TYP | MAX            | MIN |      |
| $t_{PLH}$ | $R_L = 667 \Omega$ , | $C_L = 45 \text{ pF}$ | 9      | 14  | 12             | 18  | ns   |
| $t_{PHL}$ |                      |                       | 12     | 18  | 12             | 18  |      |
| $t_{PZL}$ | $R_L = 667 \Omega$ , | $C_L = 45 \text{ pF}$ | 20     | 30  | 20             | 30  | ns   |
| $t_{PZH}$ |                      |                       | 15     | 23  | 15             | 23  |      |
| $t_{PLZ}$ | $R_L = 667 \Omega$ , | $C_L = 5 \text{ pF}$  | 10     | 20  | 10             | 20  | ns   |
| $t_{PHZ}$ |                      |                       | 15     | 25  | 15             | 25  |      |





# SN54LS240, SN54LS241, SN54LS244, SN54S240, SN54S241, SN54S244 SN74LS240, SN74LS241, SN74LS244, SN74S240, SN74S241, SN74S244 OCTAL BUFFERS AND LINE DRIVERS WITH 3-STATE OUTPUTS

SDLS144C – APRIL 1985 – REVISED MAY 2010

## recommended operating conditions

|          |  | SN54S' |     |     | SN74S' |     |      | UNIT         |
|----------|--|--------|-----|-----|--------|-----|------|--------------|
|          |  | MIN    | NOM | MAX | MIN    | NOM | MAX  |              |
| $V_{CC}$ | Supply voltage (see Note 1)                                  | 4.5    | 5   | 5.5 | 4.75   | 5   | 5.25 | V            |
| $V_{IH}$ | High-level input voltage                                     | 2      |     |     | 2      |     |      | V            |
| $V_{IL}$ | Low-level input voltage                                      |        |     | 0.8 |        |     | 0.8  | V            |
| $I_{OH}$ | High-level output current                                    |        |     | -12 |        |     | -15  | mA           |
| $I_{OL}$ | Low-level output current                                     |        |     | 48  |        |     | 64   | mA           |
|          | External resistance between any input and $V_{CC}$ or ground |        |     | 40  |        |     | 40   | k $\Omega$   |
| $T_A$    | Operating free-air temperature (see Note 3)                  | -55    |     | 125 | 0      |     | 70   | $^{\circ}$ C |

NOTES: 1. Voltage values are with respect to network ground terminal.  
3. An SN54S241J operating at free-air temperature above 116 $^{\circ}$ C requires a heat sink that provides a thermal resistance from case to free air,  $R_{\theta CA}$ , of not more than 40 $^{\circ}$ C/W.

## electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

| PARAMETER                           | TEST CONDITIONS†                                    |  | SN54S'       |      |      | SN74S' |      |      | UNIT    |
|-------------------------------------|---|--|--------------|------|------|--------|------|------|---------|
|                                     |   |  | MIN          | TYP‡ | MAX  | MIN    | TYP‡ | MAX  |         |
| $V_{IK}$                            | $V_{CC} = \text{MIN}$ ,                             | $I_I = -18 \text{ mA}$                                 |              |      | -1.2 |        |      | -1.2 | V       |
| Hysteresis<br>( $V_{T+} - V_{T-}$ ) | $V_{CC} = \text{MIN}$                               |  | 0.2          | 0.4  |      | 0.2    | 0.4  |      | V       |
| $V_{OH}$                            | $V_{CC} = \text{MIN}$<br>$I_{OH} = -1 \text{ mA}$   | $V_{IH} = 2 \text{ V}$ ,<br>$V_{IL} = 0.8 \text{ V}$ , |              |      |      | 2.7    |      |      | V       |
|                                     | $V_{CC} = \text{MIN}$ ,<br>$I_{OH} = -3 \text{ mA}$ | $V_{IH} = 2 \text{ V}$ ,<br>$V_{IL} = 0.8 \text{ V}$ , | 2.4          | 3.4  |      | 2.4    | 3.4  |      |         |
|                                     | $V_{CC} = \text{MIN}$ ,<br>$I_{OH} = \text{MAX}$    | $V_{IH} = 2 \text{ V}$ ,<br>$V_{IL} = 0.5 \text{ V}$ , | 2            |      |      | 2      |      |      |         |
| $V_{OL}$                            | $V_{CC} = \text{MIN}$ ,<br>$I_{OL} = \text{MAX}$    | $V_{IH} = 2 \text{ V}$ ,<br>$V_{IL} = 0.8 \text{ V}$ , |              |      | 0.55 |        |      | 0.55 | V       |
| $I_{OZH}$                           | $V_{CC} = \text{MAX}$ ,<br>$V_{IL} = 0.8 \text{ V}$ | $V_{IH} = 2 \text{ V}$ ,<br>$V_O = 2.4 \text{ V}$      |              |      | 50   |        |      | 50   | $\mu$ A |
| $I_{OZL}$                           | $V_{CC} = \text{MAX}$ ,<br>$V_{IL} = 0.8 \text{ V}$ | $V_{IH} = 2 \text{ V}$ ,<br>$V_O = 0.5 \text{ V}$      |              |      | -50  |        |      | -50  | $\mu$ A |
| $I_I$                               | $V_{CC} = \text{MAX}$ ,                             | $V_I = 5.5 \text{ V}$                                  |              |      | 1    |        |      | 1    | mA      |
| $I_{IH}$                            | $V_{CC} = \text{MAX}$ ,                             | $V_I = 2.7 \text{ V}$                                  |              |      | 50   |        |      | 50   | $\mu$ A |
| $I_{IL}$                            | $V_{CC} = \text{MAX}$ ,                             | $V_I = 0.5 \text{ V}$                                  | Any A        |      | -400 |        |      | -400 | $\mu$ A |
|                                     |   |  | Any G        |      | -2   |        |      | -2   | mA      |
| $I_{OS}^{\S}$                       | $V_{CC} = \text{MAX}$                               |  | -50          |      | -225 |        |      | -225 | mA      |
| $I_{CC}$                            | $V_{CC} = \text{MAX}$ ,<br>Output open              | Outputs high   | 'S240        | 80   | 123  |        | 80   | 135  | mA      |
|                                     |   |  | 'S241, 'S244 | 95   | 147  |        | 95   | 160  |         |
|                                     |   | Outputs low  | 'S240        | 100  | 145  |        | 100  | 150  |         |
|                                     |   |  | 'S241, 'S244 | 120  | 170  |        | 120  | 180  |         |
|                                     |   | Outputs disabled                                       | 'S240        | 100  | 145  |        | 100  | 150  |         |
|                                     |   |  | 'S241, 'S244 | 120  | 170  |        | 120  | 180  |         |

† For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡ All typical values are at  $V_{CC} = 5 \text{ V}$ ,  $T_A = 25^{\circ}\text{C}$ .

§ Not more than one output should be shorted at a time, and duration of the short-circuit should not exceed one second.



**SN54LS240, SN54LS241, SN54LS244, SN54S240, SN54S241, SN54S244  
 SN74LS240, SN74LS241, SN74LS244, SN74S240, SN74S241, SN74S244  
 OCTAL BUFFERS AND LINE DRIVERS WITH 3-STATE OUTPUTS**

SDLS144C – APRIL 1985 – REVISED MAY 2010


switching characteristics,  $V_{CC} = 5\text{ V}$ ,  $T_A = 25^\circ\text{C}$  (see Figure 2)

| PARAMETER | TEST CONDITIONS                            | 'S240 |     |     | 'S241, 'S244 |     |     | UNIT |
|-----------|--|-------|-----|-----|--------------|-----|-----|------|
|           |  | MIN   | TYP | MAX | MIN          | TYP | MAX |      |
| $t_{PLH}$ | $R_L = 90\ \Omega$ , $C_L = 50\ \text{pF}$ | 4.5   | 7   |     | 6            | 9   | ns  |      |
| $t_{PHL}$ |  | 4.5   | 7   |     | 6            | 9   |     |      |
| $t_{PZL}$ | $R_L = 90\ \Omega$ , $C_L = 50\ \text{pF}$ | 10    | 15  |     | 10           | 15  | ns  |      |
| $t_{PZH}$ |  | 6.5   | 10  |     | 8            | 12  |     |      |
| $t_{PLZ}$ | $R_L = 90\ \Omega$ , $C_L = 5\ \text{pF}$  | 10    | 15  |     | 10           | 15  | ns  |      |
| $t_{PHZ}$ |  | 6     | 9   |     | 6            | 9   |     |      |

**SN54LS240, SN54LS241, SN54LS244, SN54S240, SN54S241, SN54S244  
SN74LS240, SN74LS241, SN74LS244, SN74S240, SN74S241, SN74S244  
OCTAL BUFFERS AND LINE DRIVERS WITH 3-STATE OUTPUTS**

SDLS144C – APRIL 1985 – REVISED MAY 2010

**PARAMETER MEASUREMENT INFORMATION  
SERIES 54LS/74LS DEVICES**

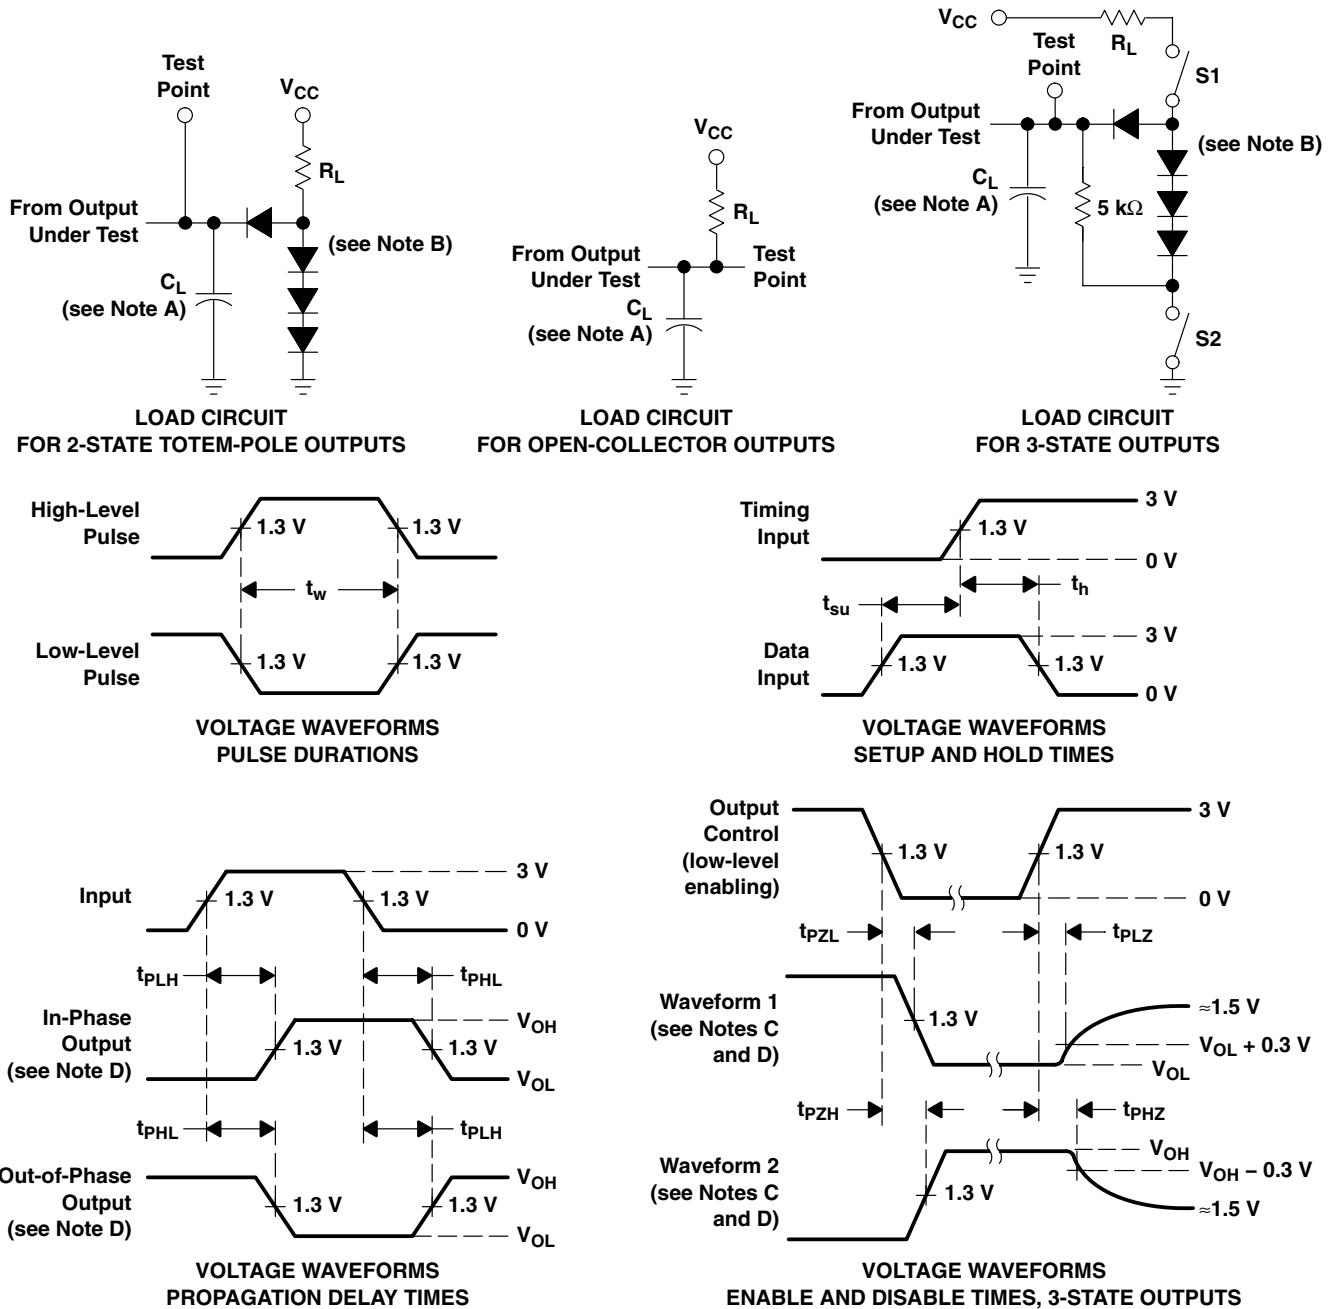

- NOTES: A.  $C_L$  includes probe and jig capacitance.  
 B. All diodes are 1N3064 or equivalent.  
 C. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.  
 D. S1 and S2 are closed for  $t_{PLH}$ ,  $t_{PHL}$ ,  $t_{PHZ}$ , and  $t_{PLZ}$ ; S1 is open and S2 is closed for  $t_{PZH}$ ; S1 is closed and S2 is open for  $t_{PZL}$ .  
 E. Phase relationships between inputs and outputs have been chosen arbitrarily for these examples.  
 F. All input pulses are supplied by generators having the following characteristics:  $PRR \leq 1$  MHz,  $Z_O \approx 50 \Omega$ ,  $t_r \leq 15$  ns,  $t_f \leq 6$  ns.  
 G. The outputs are measured one at a time with one input transition per measurement.


**Figure 1. Load Circuits and Voltage Waveforms**



SN54LS240, SN54LS241, SN54LS244, SN54S240, SN54S241, SN54S244  
 SN74LS240, SN74LS241, SN74LS244, SN74S240, SN74S241, SN74S244  
 OCTAL BUFFERS AND LINE DRIVERS WITH 3-STATE OUTPUTS

SDLS144C – APRIL 1985 – REVISED MAY 2010

PARAMETER MEASUREMENT INFORMATION  
 SERIES 54S/74S DEVICES

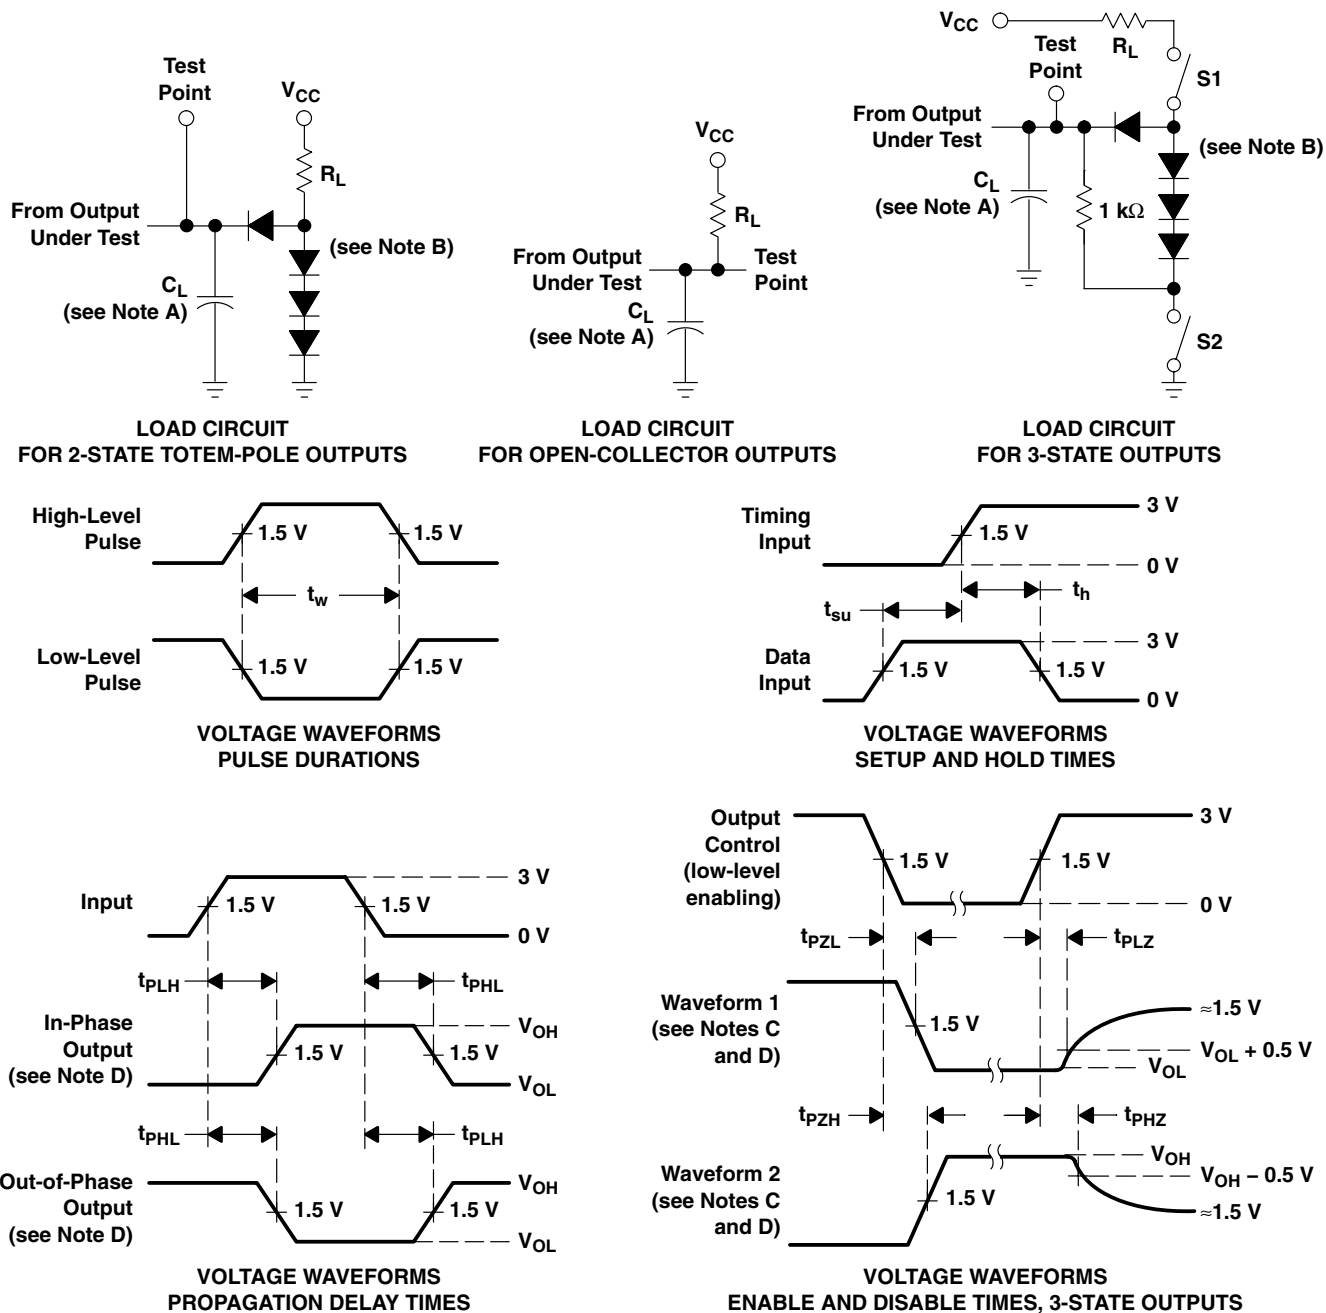


- NOTES: A.  $C_L$  includes probe and jig capacitance.  
 B. All diodes are 1N3064 or equivalent.  
 C. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.  
 D. S1 and S2 are closed for  $t_{PLH}$ ,  $t_{PHL}$ ,  $t_{PHZ}$ , and  $t_{PZL}$ ; S1 is open and S2 is closed for  $t_{PZH}$ ; S1 is closed and S2 is open for  $t_{PZL}$ .  
 E. All input pulses are supplied by generators having the following characteristics:  $PRR \leq 1$  MHz,  $Z_O \approx 50 \Omega$ ;  $t_r$  and  $t_f \leq 7$  ns for Series 54/74 devices and  $t_r$  and  $t_f \leq 2.5$  ns for Series 54S/74S devices.  
 F. The outputs are measured one at a time with one input transition per measurement.

Figure 2. Load Circuits and Voltage Waveforms


# SN54LS240, SN54LS241, SN54LS244, SN54S240, SN54S241, SN54S244 SN74LS240, SN74LS241, SN74LS244, SN74S240, SN74S241, SN74S244 OCTAL BUFFERS AND LINE DRIVERS WITH 3-STATE OUTPUTS

SDLS144C - APRIL 1985 - REVISED MAY 2010


## APPLICATION INFORMATION

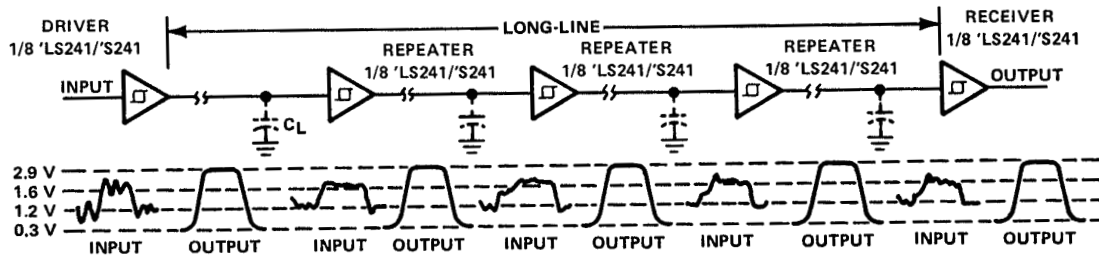


'LS241, 'S241 USED AS REPEATER/LEVEL RESTORER

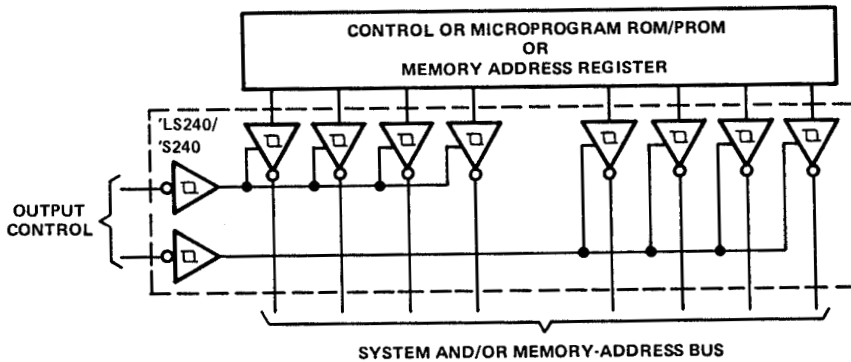

'LS240/'S240 USED AS SYSTEM AND/OR MEMORY BUS DRIVER—4-BIT ORGANIZATION CAN BE APPLIED TO HANDLE BINARY OR BCD

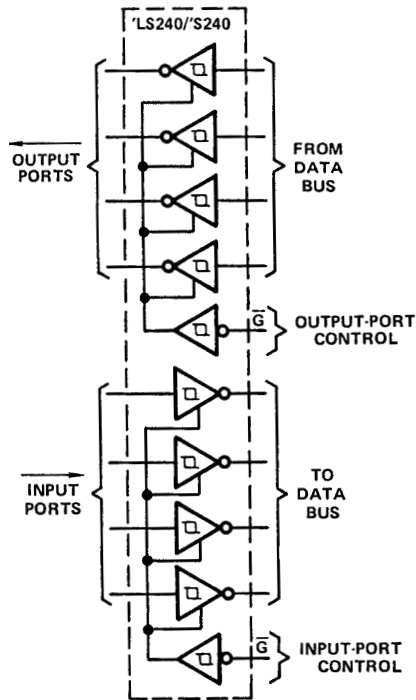

INDEPENDENT 4-BIT BUS DRIVERS/RECEIVERS IN A SINGLE PACKAGE

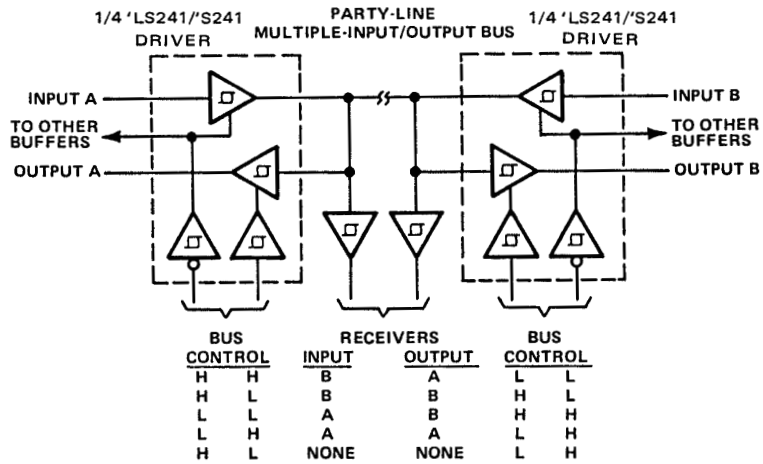

PARTY-LINE BUS SYSTEM WITH MULTIPLE INPUTS, OUTPUTS, AND RECEIVERS

**PACKAGING INFORMATION**

| Orderable Device | Status <sup>(1)</sup> | Package Type | Package Drawing | Pins | Package Qty | Eco Plan <sup>(2)</sup> | Lead/Ball Finish | MSL Peak Temp <sup>(3)</sup> |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
| 5962-7801201VRA  | ACTIVE                | CDIP         | J               | 20   | 1           | TBD                     | A42              | N / A for Pkg Type           |
| 5962-7801201VSA  | ACTIVE                | CFP          | W               | 20   | 1           | TBD                     | Call TI          | N / A for Pkg Type           |
| 7705701RA        | ACTIVE                | CDIP         | J               | 20   | 1           | TBD                     | A42              | N / A for Pkg Type           |
| 7705701SA        | ACTIVE                | CFP          | W               | 20   | 1           | TBD                     | Call TI          | N / A for Pkg Type           |
| 78012012A        | ACTIVE                | LCCC         | FK              | 20   | 1           | TBD                     | POST-PLATE       | N / A for Pkg Type           |
| 7801201RA        | ACTIVE                | CDIP         | J               | 20   | 1           | TBD                     | A42              | N / A for Pkg Type           |
| 7801201SA        | ACTIVE                | CFP          | W               | 20   | 1           | TBD                     | Call TI          | N / A for Pkg Type           |
| JM38510/32401B2A | ACTIVE                | LCCC         | FK              | 20   | 1           | TBD                     | POST-PLATE       | N / A for Pkg Type           |
| JM38510/32401BRA | ACTIVE                | CDIP         | J               | 20   | 1           | TBD                     | A42              | N / A for Pkg Type           |
| JM38510/32401BSA | ACTIVE                | CFP          | W               | 20   | 1           | TBD                     | Call TI          | N / A for Pkg Type           |
| JM38510/32402B2A | ACTIVE                | LCCC         | FK              | 20   | 1           | TBD                     | POST-PLATE       | N / A for Pkg Type           |
| JM38510/32402BRA | ACTIVE                | CDIP         | J               | 20   | 1           | TBD                     | A42              | N / A for Pkg Type           |
| JM38510/32402BSA | ACTIVE                | CFP          | W               | 20   | 1           | TBD                     | Call TI          | N / A for Pkg Type           |
| JM38510/32403B2A | ACTIVE                | LCCC         | FK              | 20   | 1           | TBD                     | POST-PLATE       | N / A for Pkg Type           |
| JM38510/32403BRA | ACTIVE                | CDIP         | J               | 20   | 1           | TBD                     | A42              | N / A for Pkg Type           |
| JM38510/32403BSA | ACTIVE                | CFP          | W               | 20   | 1           | TBD                     | Call TI          | N / A for Pkg Type           |
| JM38510/32403SRA | ACTIVE                | CDIP         | J               | 20   | 1           | TBD                     | A42              | N / A for Pkg Type           |
| JM38510/32403SSA | ACTIVE                | CFP          | W               | 20   | 1           | TBD                     | Call TI          | N / A for Pkg Type           |
| SN54LS240J       | ACTIVE                | CDIP         | J               | 20   | 1           | TBD                     | A42              | N / A for Pkg Type           |
| SN54LS241J       | ACTIVE                | CDIP         | J               | 20   | 1           | TBD                     | A42              | N / A for Pkg Type           |
| SN54LS244J       | ACTIVE                | CDIP         | J               | 20   | 1           | TBD                     | A42              | N / A for Pkg Type           |
| SN54S240J        | ACTIVE                | CDIP         | J               | 20   | 1           | TBD                     | A42              | N / A for Pkg Type           |
| SN54S241J        | ACTIVE                | CDIP         | J               | 20   | 1           | TBD                     | A42              | N / A for Pkg Type           |
| SN54S244J        | ACTIVE                | CDIP         | J               | 20   | 1           | TBD                     | A42              | N / A for Pkg Type           |
| SN74LS240DW      | ACTIVE                | SOIC         | DW              | 20   | 25          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74LS240DWG4    | ACTIVE                | SOIC         | DW              | 20   | 25          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74LS240DWR     | ACTIVE                | SOIC         | DW              | 20   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74LS240DWRE4   | ACTIVE                | SOIC         | DW              | 20   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74LS240DWRG4   | ACTIVE                | SOIC         | DW              | 20   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74LS240J       | OBSOLETE              | CDIP         | J               | 20   |             | TBD                     | Call TI          | Call TI                      |
| SN74LS240N       | ACTIVE                | PDIP         | N               | 20   | 20          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| SN74LS240N3      | OBSOLETE              | PDIP         | N               | 20   |             | TBD                     | Call TI          | Call TI                      |
| SN74LS240NE4     | ACTIVE                | PDIP         | N               | 20   | 20          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| SN74LS240NSR     | ACTIVE                | SO           | NS              | 20   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74LS240NSRE4   | ACTIVE                | SO           | NS              | 20   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74LS240NSRG4   | ACTIVE                | SO           | NS              | 20   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |

| Orderable Device | Status <sup>(1)</sup> | Package Type | Package Drawing | Pins | Package Qty | Eco Plan <sup>(2)</sup> | Lead/Ball Finish | MSL Peak Temp <sup>(3)</sup> |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
|                  |                       |              |                 |      |             | no Sb/Br)               |                  |                              |
| SN74LS241DW      | ACTIVE                | SOIC         | DW              | 20   | 25          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74LS241DWE4    | ACTIVE                | SOIC         | DW              | 20   | 25          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74LS241DWG4    | ACTIVE                | SOIC         | DW              | 20   | 25          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74LS241DWR     | ACTIVE                | SOIC         | DW              | 20   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74LS241DWRE4   | ACTIVE                | SOIC         | DW              | 20   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74LS241DWRG4   | ACTIVE                | SOIC         | DW              | 20   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74LS241J       | OBSOLETE              | CDIP         | J               | 20   |             | TBD                     | Call TI          | Call TI                      |
| SN74LS241N       | ACTIVE                | PDIP         | N               | 20   | 20          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| SN74LS241N3      | OBSOLETE              | PDIP         | N               | 20   |             | TBD                     | Call TI          | Call TI                      |
| SN74LS241NE4     | ACTIVE                | PDIP         | N               | 20   | 20          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| SN74LS241NSR     | ACTIVE                | SO           | NS              | 20   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74LS241NSRE4   | ACTIVE                | SO           | NS              | 20   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74LS241NSRG4   | ACTIVE                | SO           | NS              | 20   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74LS244DBR     | ACTIVE                | SSOP         | DB              | 20   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74LS244DBRE4   | ACTIVE                | SSOP         | DB              | 20   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74LS244DBRG4   | ACTIVE                | SSOP         | DB              | 20   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74LS244DW      | ACTIVE                | SOIC         | DW              | 20   | 25          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74LS244DWE4    | ACTIVE                | SOIC         | DW              | 20   | 25          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74LS244DWG4    | ACTIVE                | SOIC         | DW              | 20   | 25          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74LS244DWR     | ACTIVE                | SOIC         | DW              | 20   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74LS244DWRE4   | ACTIVE                | SOIC         | DW              | 20   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74LS244DWRG4   | ACTIVE                | SOIC         | DW              | 20   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74LS244J       | OBSOLETE              | CDIP         | J               | 20   |             | TBD                     | Call TI          | Call TI                      |
| SN74LS244N       | ACTIVE                | PDIP         | N               | 20   | 20          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| SN74LS244N3      | OBSOLETE              | PDIP         | N               | 20   |             | TBD                     | Call TI          | Call TI                      |
| SN74LS244NE4     | ACTIVE                | PDIP         | N               | 20   | 20          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| SN74LS244NSR     | ACTIVE                | SO           | NS              | 20   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |

| Orderable Device | Status <sup>(1)</sup> | Package Type | Package Drawing | Pins | Package Qty | Eco Plan <sup>(2)</sup> | Lead/Ball Finish | MSL Peak Temp <sup>(3)</sup> |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
| SN74LS244NSRE4   | ACTIVE                | SO           | NS              | 20   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74LS244NSRG4   | ACTIVE                | SO           | NS              | 20   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74S240DW       | ACTIVE                | SOIC         | DW              | 20   | 25          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74S240DWE4     | ACTIVE                | SOIC         | DW              | 20   | 25          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74S240DWG4     | ACTIVE                | SOIC         | DW              | 20   | 25          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74S240DWR      | ACTIVE                | SOIC         | DW              | 20   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74S240DWRE4    | ACTIVE                | SOIC         | DW              | 20   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74S240DWRG4    | ACTIVE                | SOIC         | DW              | 20   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74S240N        | ACTIVE                | PDIP         | N               | 20   | 20          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| SN74S240N3       | OBSOLETE              | PDIP         | N               | 20   |             | TBD                     | Call TI          | Call TI                      |
| SN74S240NE4      | ACTIVE                | PDIP         | N               | 20   | 20          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| SN74S241DW       | ACTIVE                | SOIC         | DW              | 20   | 25          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74S241DWE4     | ACTIVE                | SOIC         | DW              | 20   | 25          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74S241DWG4     | ACTIVE                | SOIC         | DW              | 20   | 25          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74S241DWR      | ACTIVE                | SOIC         | DW              | 20   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74S241DWRE4    | ACTIVE                | SOIC         | DW              | 20   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74S241DWRG4    | ACTIVE                | SOIC         | DW              | 20   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74S241J        | OBSOLETE              | CDIP         | J               | 20   |             | TBD                     | Call TI          | Call TI                      |
| SN74S241N        | ACTIVE                | PDIP         | N               | 20   | 20          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| SN74S241N3       | OBSOLETE              | PDIP         | N               | 20   |             | TBD                     | Call TI          | Call TI                      |
| SN74S241NE4      | ACTIVE                | PDIP         | N               | 20   | 20          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| SN74S244DW       | ACTIVE                | SOIC         | DW              | 20   | 25          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74S244DWE4     | ACTIVE                | SOIC         | DW              | 20   | 25          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74S244DWG4     | ACTIVE                | SOIC         | DW              | 20   | 25          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74S244DWR      | ACTIVE                | SOIC         | DW              | 20   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74S244DWRE4    | ACTIVE                | SOIC         | DW              | 20   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| SN74S244DWRG4    | ACTIVE                | SOIC         | DW              | 20   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |



| Orderable Device | Status <sup>(1)</sup> | Package Type | Package Drawing | Pins | Package Qty | Eco Plan <sup>(2)</sup> | Lead/Ball Finish | MSL Peak Temp <sup>(3)</sup> |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
| SN74S244J        | OBSOLETE              | CDIP         | J               | 20   |             | TBD                     | Call TI          | Call TI                      |
| SN74S244N        | ACTIVE                | PDIP         | N               | 20   | 20          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| SN74S244N3       | OBSOLETE              | PDIP         | N               | 20   |             | TBD                     | Call TI          | Call TI                      |
| SN74S244NE4      | ACTIVE                | PDIP         | N               | 20   | 20          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| SNJ54LS240FK     | ACTIVE                | LCCC         | FK              | 20   | 1           | TBD                     | POST-PLATE       | N / A for Pkg Type           |
| SNJ54LS240J      | ACTIVE                | CDIP         | J               | 20   | 1           | TBD                     | A42              | N / A for Pkg Type           |
| SNJ54LS240W      | ACTIVE                | CFP          | W               | 20   | 1           | TBD                     | Call TI          | N / A for Pkg Type           |
| SNJ54LS241FK     | ACTIVE                | LCCC         | FK              | 20   | 1           | TBD                     | POST-PLATE       | N / A for Pkg Type           |
| SNJ54LS241J      | ACTIVE                | CDIP         | J               | 20   | 1           | TBD                     | A42              | N / A for Pkg Type           |
| SNJ54LS241W      | ACTIVE                | CFP          | W               | 20   | 1           | TBD                     | Call TI          | N / A for Pkg Type           |
| SNJ54LS244FK     | ACTIVE                | LCCC         | FK              | 20   | 1           | TBD                     | POST-PLATE       | N / A for Pkg Type           |
| SNJ54LS244J      | ACTIVE                | CDIP         | J               | 20   | 1           | TBD                     | A42              | N / A for Pkg Type           |
| SNJ54LS244W      | ACTIVE                | CFP          | W               | 20   | 1           | TBD                     | Call TI          | N / A for Pkg Type           |
| SNJ54S240FK      | ACTIVE                | LCCC         | FK              | 20   | 1           | TBD                     | POST-PLATE       | N / A for Pkg Type           |
| SNJ54S240J       | ACTIVE                | CDIP         | J               | 20   | 1           | TBD                     | A42              | N / A for Pkg Type           |
| SNJ54S240W       | ACTIVE                | CFP          | W               | 20   | 1           | TBD                     | Call TI          | N / A for Pkg Type           |
| SNJ54S241FK      | ACTIVE                | LCCC         | FK              | 20   | 1           | TBD                     | POST-PLATE       | N / A for Pkg Type           |
| SNJ54S241J       | ACTIVE                | CDIP         | J               | 20   | 1           | TBD                     | A42              | N / A for Pkg Type           |
| SNJ54S241W       | ACTIVE                | CFP          | W               | 20   | 1           | TBD                     | Call TI          | N / A for Pkg Type           |
| SNJ54S244FK      | ACTIVE                | LCCC         | FK              | 20   | 1           | TBD                     | POST-PLATE       | N / A for Pkg Type           |
| SNJ54S244J       | ACTIVE                | CDIP         | J               | 20   | 1           | TBD                     | A42              | N / A for Pkg Type           |
| SNJ54S244W       | ACTIVE                | CFP          | W               | 20   | 1           | TBD                     | Call TI          | N / A for Pkg Type           |

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

<sup>(3)</sup> MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on

incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**TAPE AND REEL INFORMATION**

**QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE**


\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| SN74LS240DWR | SOIC         | DW              | 20   | 2000 | 330.0              | 24.4               | 10.8    | 13.0    | 2.7     | 12.0    | 24.0   | Q1            |
| SN74LS240NSR | SO           | NS              | 20   | 2000 | 330.0              | 24.4               | 8.2     | 13.0    | 2.5     | 12.0    | 24.0   | Q1            |
| SN74LS241DWR | SOIC         | DW              | 20   | 2000 | 330.0              | 24.4               | 10.8    | 13.0    | 2.7     | 12.0    | 24.0   | Q1            |
| SN74LS241NSR | SO           | NS              | 20   | 2000 | 330.0              | 24.4               | 8.2     | 13.0    | 2.5     | 12.0    | 24.0   | Q1            |
| SN74LS244DBR | SSOP         | DB              | 20   | 2000 | 330.0              | 16.4               | 8.2     | 7.5     | 2.5     | 12.0    | 16.0   | Q1            |
| SN74LS244DWR | SOIC         | DW              | 20   | 2000 | 330.0              | 24.4               | 10.8    | 13.0    | 2.7     | 12.0    | 24.0   | Q1            |
| SN74LS244NSR | SO           | NS              | 20   | 2000 | 330.0              | 24.4               | 8.2     | 13.0    | 2.5     | 12.0    | 24.0   | Q1            |
| SN74S240DWR  | SOIC         | DW              | 20   | 2000 | 330.0              | 24.4               | 10.8    | 13.0    | 2.7     | 12.0    | 24.0   | Q1            |
| SN74S241DWR  | SOIC         | DW              | 20   | 2000 | 330.0              | 24.4               | 10.8    | 13.0    | 2.7     | 12.0    | 24.0   | Q1            |
| SN74S244DWR  | SOIC         | DW              | 20   | 2000 | 330.0              | 24.4               | 10.8    | 13.0    | 2.7     | 12.0    | 24.0   | Q1            |

**TAPE AND REEL BOX DIMENSIONS**


\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|--------------|--------------|-----------------|------|------|-------------|------------|-------------|
| SN74LS240DWR | SOIC         | DW              | 20   | 2000 | 346.0       | 346.0      | 41.0        |
| SN74LS240NSR | SO           | NS              | 20   | 2000 | 346.0       | 346.0      | 41.0        |
| SN74LS241DWR | SOIC         | DW              | 20   | 2000 | 346.0       | 346.0      | 41.0        |
| SN74LS241NSR | SO           | NS              | 20   | 2000 | 346.0       | 346.0      | 41.0        |
| SN74LS244DBR | SSOP         | DB              | 20   | 2000 | 346.0       | 346.0      | 33.0        |
| SN74LS244DWR | SOIC         | DW              | 20   | 2000 | 346.0       | 346.0      | 41.0        |
| SN74LS244NSR | SO           | NS              | 20   | 2000 | 346.0       | 346.0      | 41.0        |
| SN74S240DWR  | SOIC         | DW              | 20   | 2000 | 346.0       | 346.0      | 41.0        |
| SN74S241DWR  | SOIC         | DW              | 20   | 2000 | 346.0       | 346.0      | 41.0        |
| SN74S244DWR  | SOIC         | DW              | 20   | 2000 | 346.0       | 346.0      | 41.0        |

J (R-GDIP-T\*\*)

14 LEADS SHOWN

CERAMIC DUAL IN-LINE PACKAGE



| DIM \ PINS ** | 14                     | 16                     | 18                     | 20                     |
|---------------|------------------------|------------------------|------------------------|------------------------|
| A             | 0.300<br>(7,62)<br>BSC | 0.300<br>(7,62)<br>BSC | 0.300<br>(7,62)<br>BSC | 0.300<br>(7,62)<br>BSC |
| B MAX         | 0.785<br>(19,94)       | .840<br>(21,34)        | 0.960<br>(24,38)       | 1.060<br>(26,92)       |
| B MIN         | —                      | —                      | —                      | —                      |
| C MAX         | 0.300<br>(7,62)        | 0.300<br>(7,62)        | 0.310<br>(7,87)        | 0.300<br>(7,62)        |
| C MIN         | 0.245<br>(6,22)        | 0.245<br>(6,22)        | 0.220<br>(5,59)        | 0.245<br>(6,22)        |




4040083/F 03/03

- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. This package is hermetically sealed with a ceramic lid using glass frit.
  - D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
  - E. Falls within MIL STD 1835 GDIP1-T14, GDIP1-T16, GDIP1-T18 and GDIP1-T20.

W (R-GDFP-F20)

CERAMIC DUAL FLATPACK

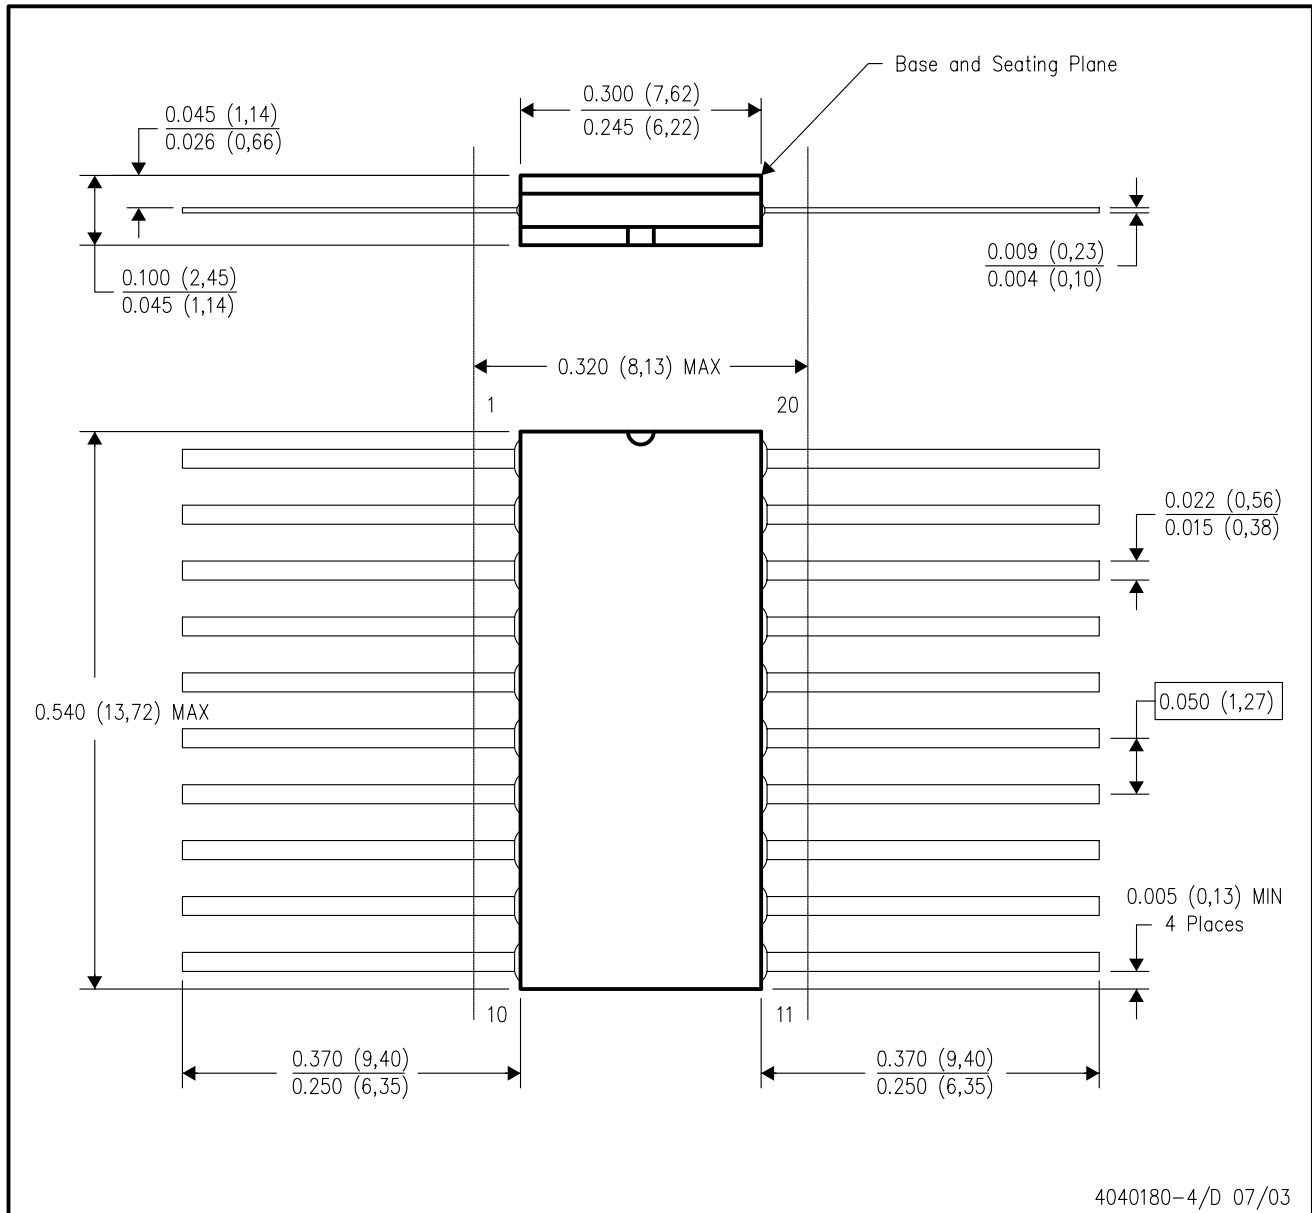


- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. This package can be hermetically sealed with a ceramic lid using glass frit.
  - D. Index point is provided on cap for terminal identification only.
  - E. Falls within Mil-Std 1835 GDFP2-F20

FK (S-CQCC-N\*\*)

LEADLESS CERAMIC CHIP CARRIER

28 TERMINAL SHOWN

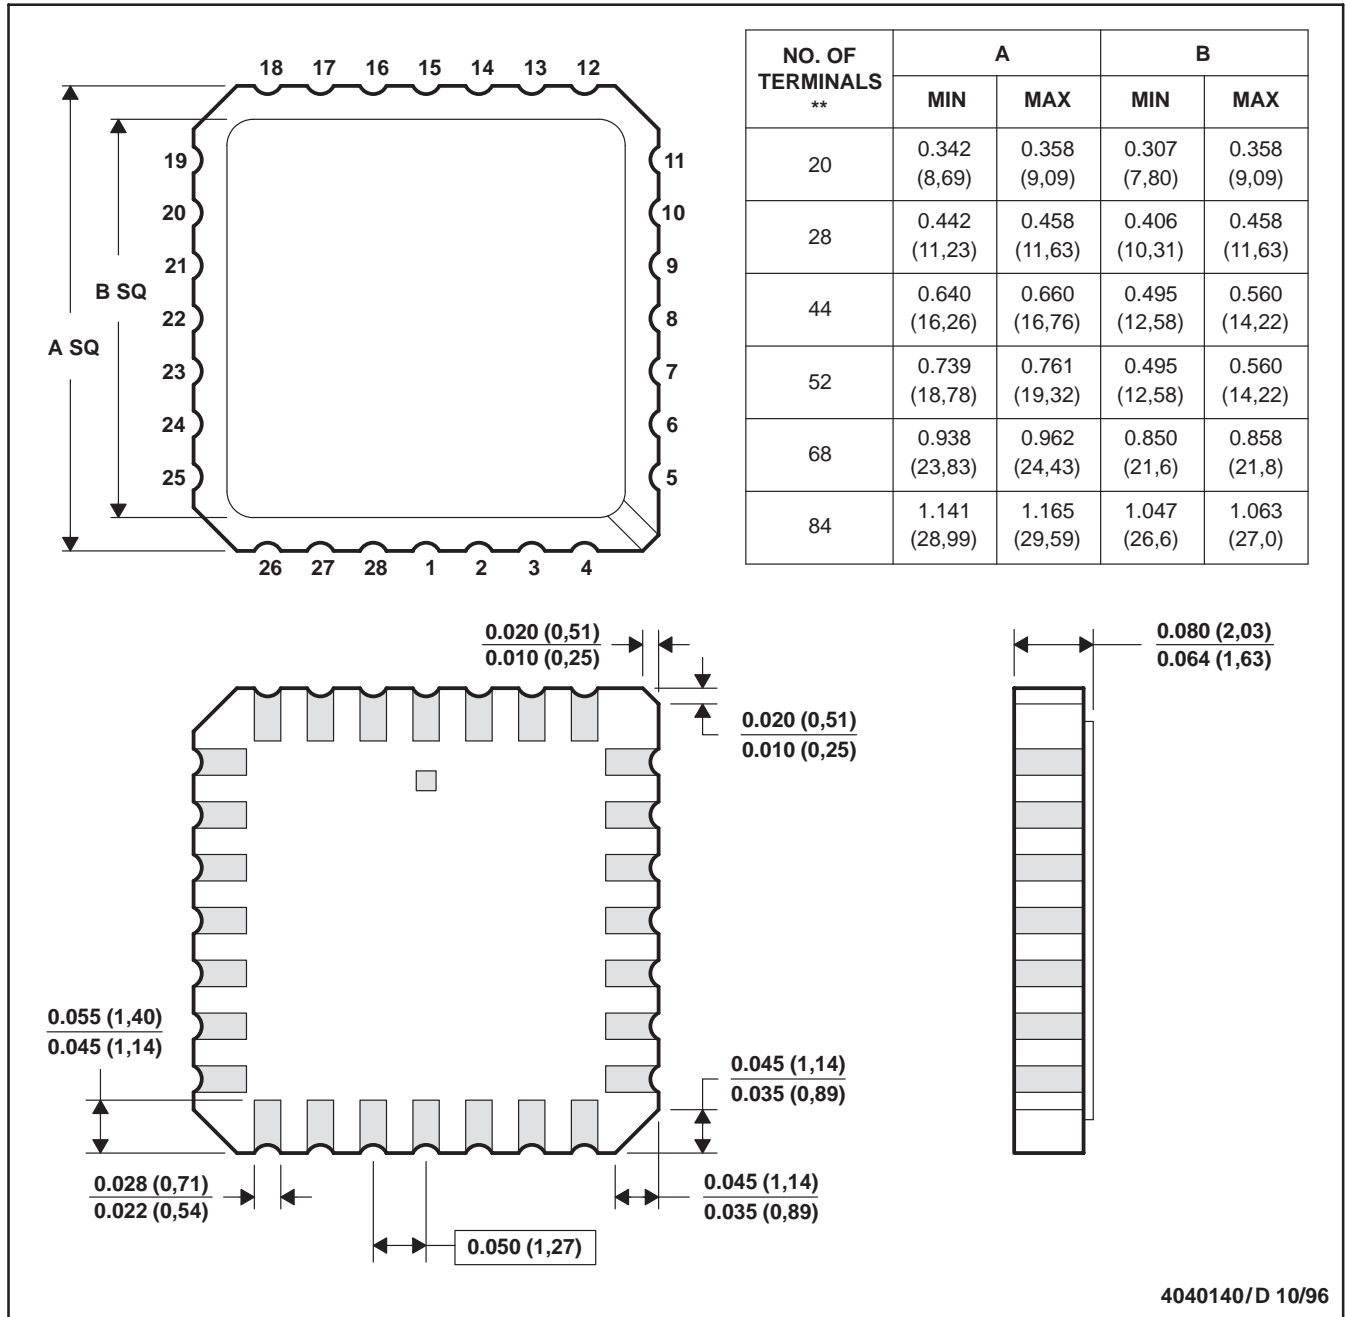

- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. This package can be hermetically sealed with a metal lid.
  - D. The terminals are gold plated.
  - E. Falls within JEDEC MS-004

N (R-PDIP-T\*\*)

PLASTIC DUAL-IN-LINE PACKAGE

16 PINS SHOWN




4040049/E 12/2002

- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - $\triangle C$  Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
  - $\triangle D$  The 20 pin end lead shoulder width is a vendor option, either half or full width.



DW (R-PDSO-G20)

PLASTIC SMALL-OUTLINE PACKAGE

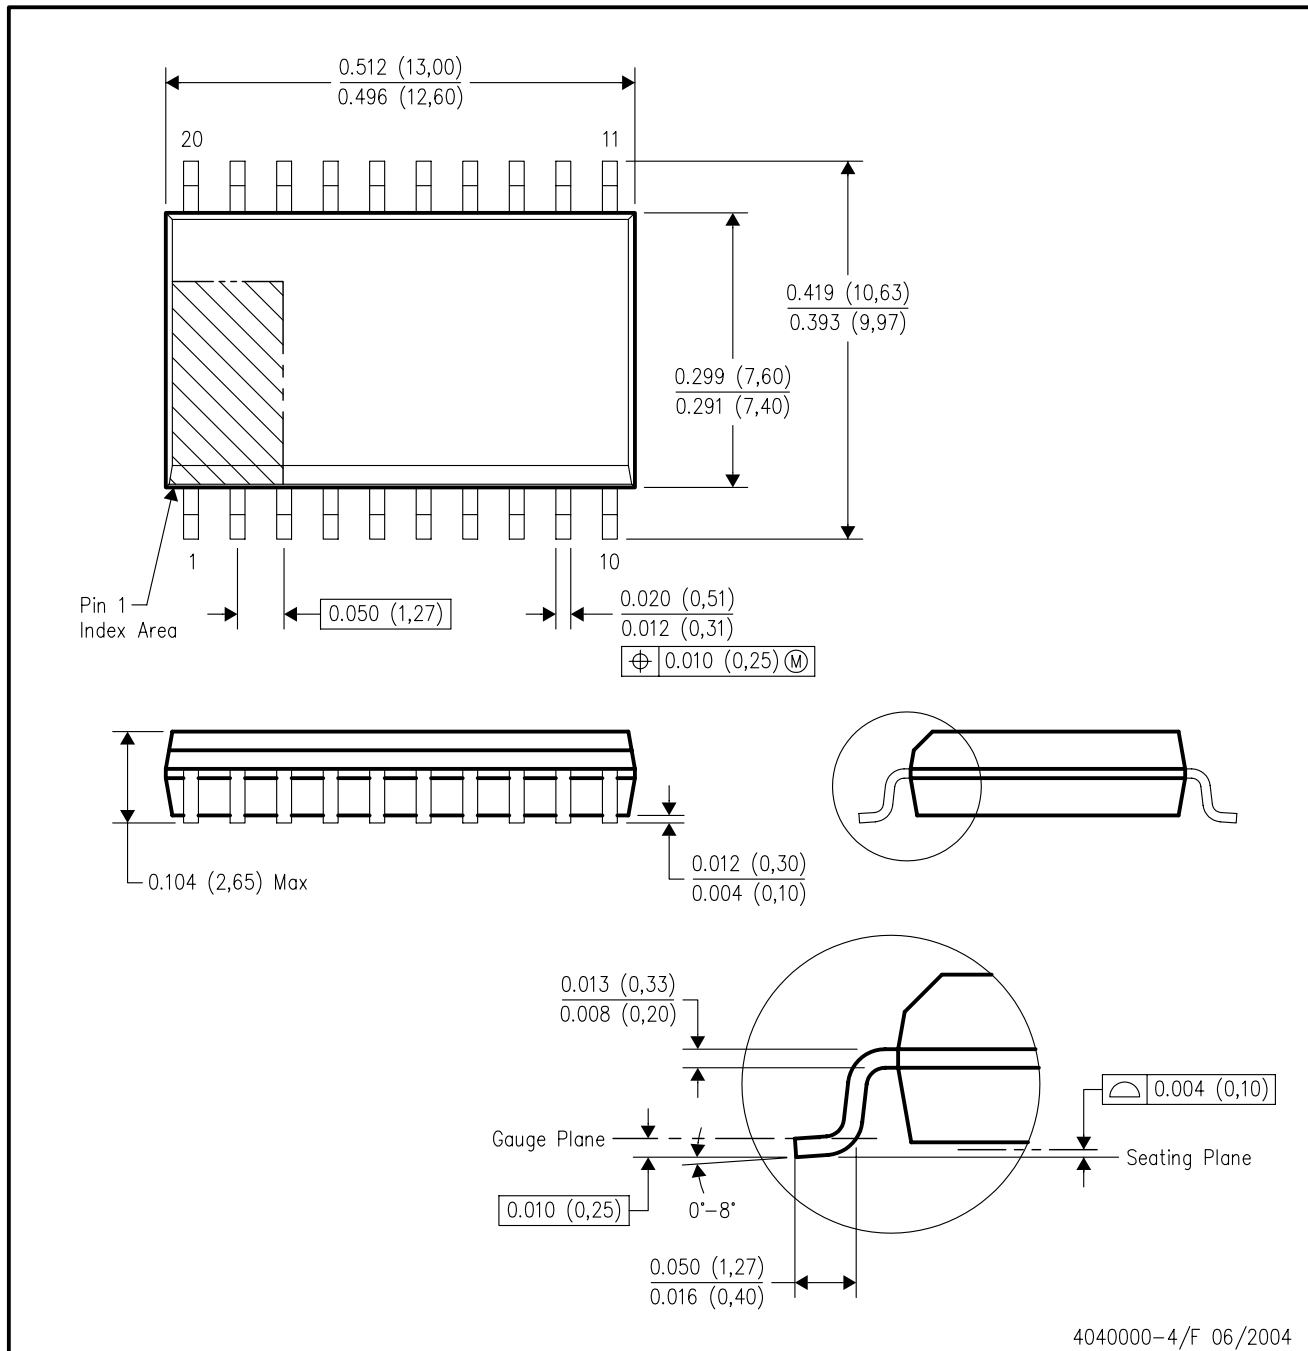

- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).
  - D. Falls within JEDEC MS-013 variation AC.

# MECHANICAL DATA

NS (R-PDSO-G\*\*)

PLASTIC SMALL-OUTLINE PACKAGE

14-PINS SHOWN



- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.

DB (R-PDSO-G\*\*)

PLASTIC SMALL-OUTLINE

28 PINS SHOWN



- NOTES: A. All linear dimensions are in millimeters.  
 B. This drawing is subject to change without notice.  
 C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.  
 D. Falls within JEDEC MO-150

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

| <b>Products</b>             |  | <b>Applications</b>        |  |
|-----------------------------|--|----------------------------|--|
| Amplifiers                  | <a href="http://amplifier.ti.com">amplifier.ti.com</a>             | Audio                      | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                                   |
| Data Converters             | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>     | Automotive                 | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>                         |
| DLP® Products               | <a href="http://www.dlp.com">www.dlp.com</a>                       | Communications and Telecom | <a href="http://www.ti.com/communications">www.ti.com/communications</a>                 |
| DSP                         | <a href="http://dsp.ti.com">dsp.ti.com</a>                         | Computers and Peripherals  | <a href="http://www.ti.com/computers">www.ti.com/computers</a>                           |
| Clocks and Timers           | <a href="http://www.ti.com/clocks">www.ti.com/clocks</a>           | Consumer Electronics       | <a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>                   |
| Interface                   | <a href="http://interface.ti.com">interface.ti.com</a>             | Energy                     | <a href="http://www.ti.com/energy">www.ti.com/energy</a>                                 |
| Logic                       | <a href="http://logic.ti.com">logic.ti.com</a>                     | Industrial                 | <a href="http://www.ti.com/industrial">www.ti.com/industrial</a>                         |
| Power Mgmt                  | <a href="http://power.ti.com">power.ti.com</a>                     | Medical                    | <a href="http://www.ti.com/medical">www.ti.com/medical</a>                               |
| Microcontrollers            | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a> | Security                   | <a href="http://www.ti.com/security">www.ti.com/security</a>                             |
| RFID                        | <a href="http://www.ti-rfid.com">www.ti-rfid.com</a>               | Space, Avionics & Defense  | <a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a> |
| RF/IF and ZigBee® Solutions | <a href="http://www.ti.com/lprf">www.ti.com/lprf</a>               | Video and Imaging          | <a href="http://www.ti.com/video">www.ti.com/video</a>                                   |
|                             |  | Wireless                   | <a href="http://www.ti.com/wireless-apps">www.ti.com/wireless-apps</a>                   |