



HESTORE.HU

elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.


Zener Diodes

Features

- Silicon planar power Zener diodes
- For use in stabilizing and clipping circuits with high power rating
- The Zener voltages are graded according to the international E 12 standard. Smaller voltage tolerances are available upon request
- These diodes are also available in the MELF case with the type designation ZMY3V9 to ZMY100
- AEC-Q101 qualified
- Compliant to RoHS directive 2002/95/EC and in accordance to WEEE 2002/96/EC
- Halogen-free according to IEC 61249-2-21 definition



RoHS
COMPLIANT
HALOGEN
FREE

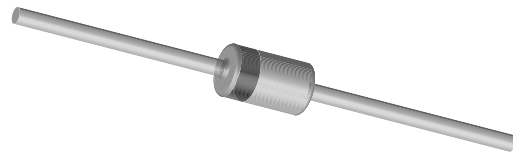

17173

Mechanical Data

Case: DO-41

Weight: approx. 310 mg

Cathode band color: black

Packaging codes/options:

TR/5K per 13" reel (52 mm tape), 25K/box

TAP/5K per ammpack (52 mm tape), 25K/box

Absolute Maximum Ratings

$T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified

Parameter	Test condition	Symbol	Value	Unit
Zener current (see Table "Characteristics")				
Power dissipation		P_{tot}	1.3 ¹⁾	W

Notes:

¹⁾ Valid provided that leads at a distance of 4 mm from case are kept at ambient temperature

Thermal Characteristics

$T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified

Parameter	Test condition	Symbol	Value	Unit
Thermal resistance junction to ambient air		R_{thJA}	110 ¹⁾	K/W
Maximum junction temperature		T_j	175	$^{\circ}\text{C}$
Storage temperature range		T_{stg}	- 55 to + 175	$^{\circ}\text{C}$

Notes:

¹⁾ Valid provided that leads at a distance of 4 mm from case are kept at ambient temperature

Electrical Characteristics

Part number	Zener voltage range ²⁾		Dynamic resistance	Temperature coefficient of Zener voltage		Test current	Reverse voltage	Admissible Zener current ¹⁾
	V_Z at I_{ZT}		r_{zj} at I_{ZT1} , $f = 1$ kHz	TC_{VZ} at I_{ZT}		I_{ZT}	V_R at $I_R = 0.5 \mu A$	I_Z at $T_{amb} = 25^\circ C$
	V		Ω	$10^{-4}/^\circ C$		mA	V	mA
	min.	max.	typ.	min.	max.			
ZPY3V9	3.7	4.1	4 (< 7)	- 7	2	100	-	290
ZPY4V3	4.0	4.6	4 (< 7)	- 7	3	100	-	260
ZPY4V7	4.4	5.0	4 (< 7)	- 7	4	100	-	235
ZPY5V1	4.8	5.4	2 (< 5)	- 6	5	100	> 0.7	215
ZPY5V6	5.2	6.0	1 (< 2)	- 3	5	100	> 1.5	193
ZPY6V2	5.8	6.6	1 (< 2)	- 1	6	100	> 2.0	183
ZPY6V8	6.4	7.2	1 (< 2)	0	7	100	> 3.0	157
ZPY7V5	7.0	7.9	1 (< 2)	0	7	100	> 5.0	143
ZPY8V2	7.7	8.7	1 (< 2)	3	8	100	> 6.0	127
ZPY9V1	8.5	9.6	2 (< 4)	3	8	50	> 7.0	117
ZPY10	9.41	10.6	2 (< 4)	5	9	50	> 7.5	105
ZPY11	10.4	11.6	3 (< 7)	5	10	50	> 8.5	94
ZPY12	11.4	12.7	3 (< 7)	5	10	50	> 9.0	85
ZPY13	12.4	14.1	4 (< 9)	5	10	50	> 10	78
ZPY15	13.8	15.8	4 (< 9)	5	10	50	> 11	70
ZPY16	15.3	17.1	5 (< 10)	7	11	25	> 12	63
ZPY18	16.8	19.1	5 (< 11)	7	11	25	> 14	57
ZPY20	18.8	21.2	6 (< 12)	7	11	25	> 15	52
ZPY22	20.8	23.3	7 (< 13)	7	11	25	> 17	48
ZPY24	22.8	25.6	8 (< 14)	7	12	25	> 18	42
ZPY27	25.1	28.9	9 (< 15)	7	12	25	> 20	38
ZPY30	28	32	10 (< 20)	7	12	25	> 22.5	35
ZPY33	31	35	11 (< 20)	7	12	25	> 25	31
ZPY36	34	38	25 (< 60)	7	12	10	> 27	29
ZPY39	37	41	30 (< 60)	8	12	10	> 29	26
ZPY43	40	46	35 (< 80)	8	13	10	> 32	24
ZPY47	44	50	40 (< 80)	8	13	10	> 35	22
ZPY51	48	54	45 (< 100)	8	13	10	> 38	20
ZPY56	52	60	50 (< 100)	8	13	10	> 42	18
ZPY62	58	66	60 (< 130)	8	13	10	> 47	16
ZPY68	64	72	65 (< 130)	8	13	10	> 51	14
ZPY75	70	79	70 (< 160)	8	13	10	> 56	13
ZPY82	77	88	80 (< 160)	8	13	10	> 61	12
ZPY91	85	96	120 (< 250)	9	13	5	> 68	11
ZPY100	94	106	130 (< 250)	9	13	5	> 75	10

Notes:

¹⁾ Valid provided that leads are kept at ambient temperature at a distance of 10 mm from case

²⁾ Tested with pulses $t_p = 5$ ms

Typical Characteristics

$T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified

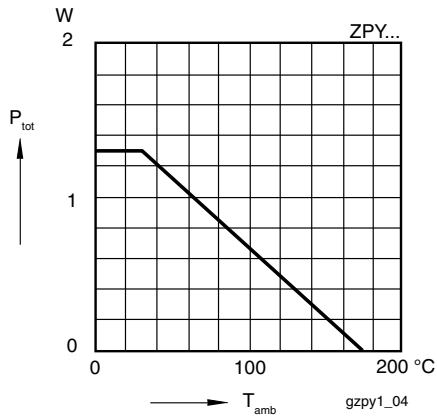


Figure 1. Admissible Power Dissipation vs. Ambient Temperature

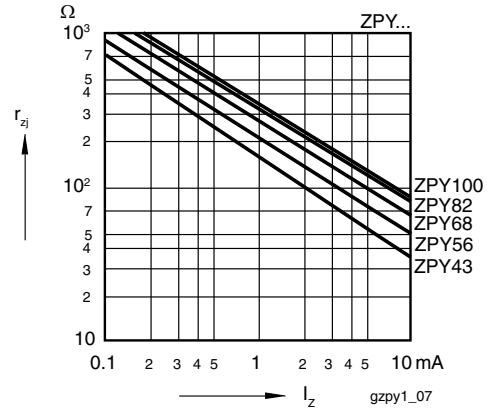


Figure 4. Dynamic Resistance vs. Zener Current

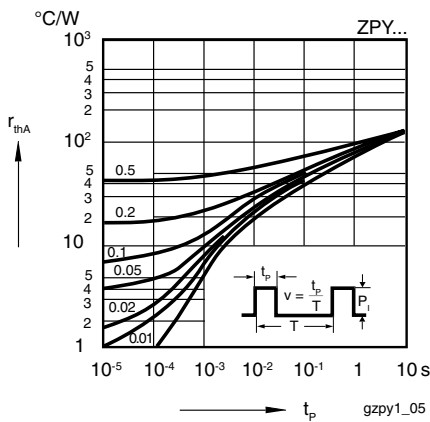


Figure 2. Pulse Thermal Resistance vs. Pulse Duration

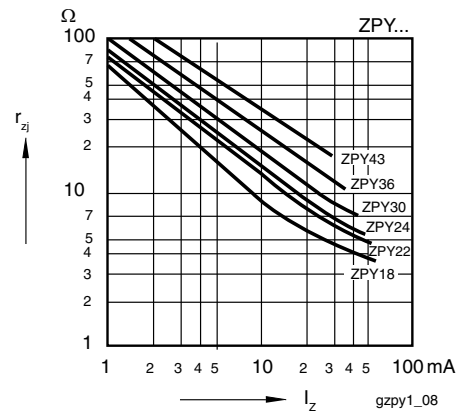


Figure 5. Dynamic Resistance vs. Zener Current

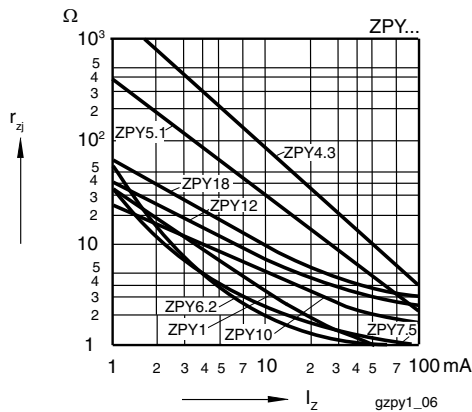


Figure 3. Dynamic Resistance vs. Zener Current

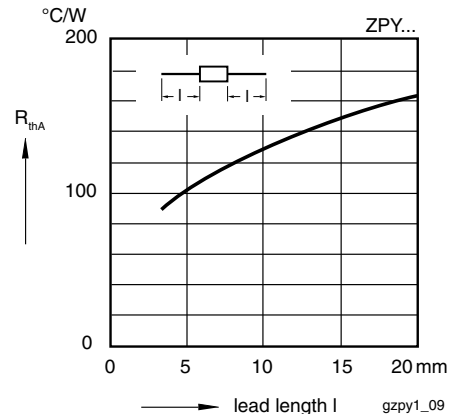


Figure 6. Thermal Resistance vs. Lead Length

ZPY3V9 to ZPY100

Vishay Semiconductors

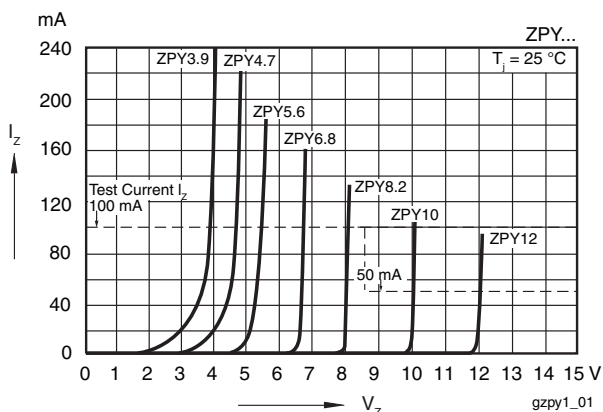


Figure 7. Breakdown Characteristics

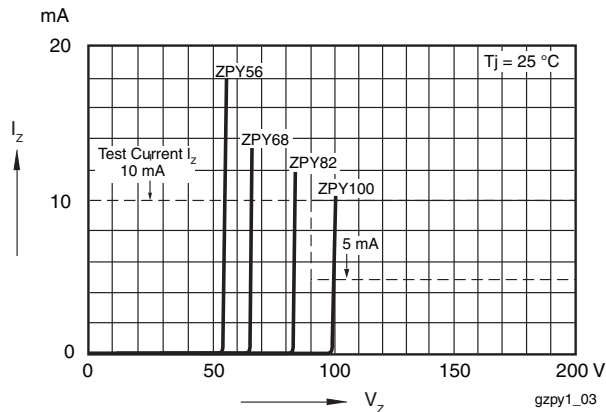


Figure 9. Breakdown Characteristics


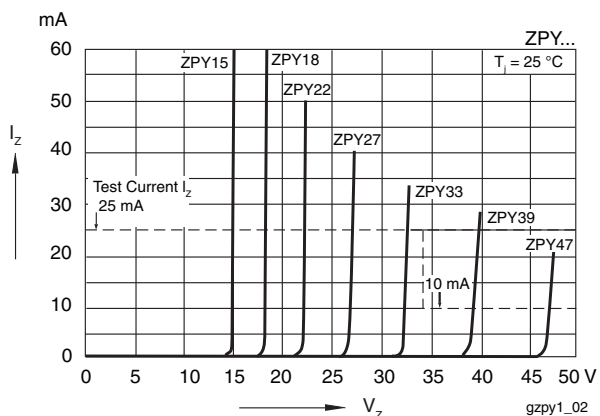


Figure 8. Breakdown Characteristics

Package Dimensions in millimeters (inches): DO-41



Document no.: 6.561-5001.02-4
 Rev. 3 - Date: 09 February 2005
 94 9368

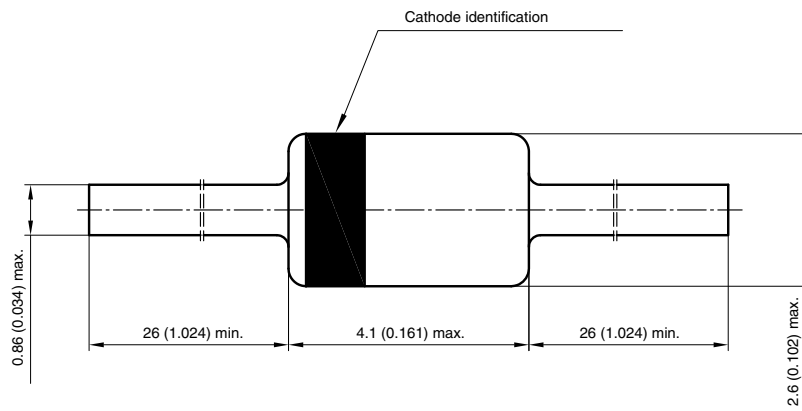

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.