




HESTORE.HU

elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.


ZL201, ZL202 SERIES 2.54 MM (0.100") STRAIGHT PIN HEADER

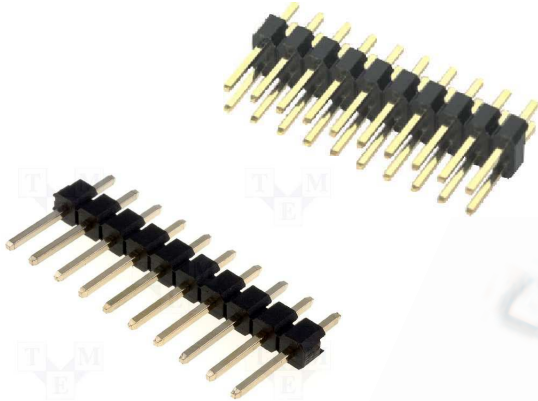

Specification:

- 1) To +105° Current Rate: 3 A
- 2) Dielectric Withstanding Voltage: 500 VAC
- 3) Insulation Resistance: 5000 M
- 4) Temperature: -55°C ~ 105°C
- 5) Insulator: Thermoplastic (UL94V-0)
- 6) Contact: Copper Alloy
- 7) Contact Plated: Gold Flash

Series No.	No. of Contact (N)
ZL201-10G	1 x 10
ZL201-20G	1 x 20
ZL201-36G	1 x 36
ZL201-40G	1 x 40
ZL201-50G	1 x 50
ZL202-20G	2 x 10
ZL202-40G	2 x 20
ZL202-80G	2 x 40
ZL202-100G	2 x 50

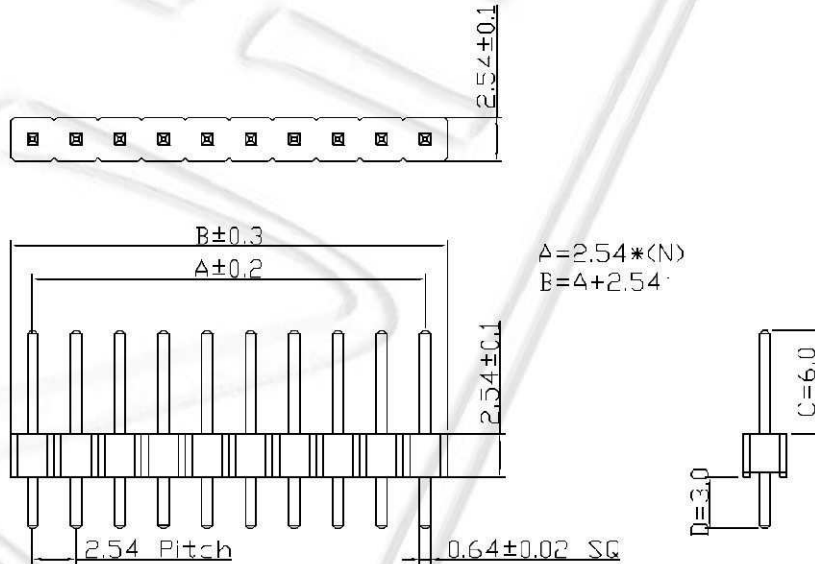


ZL201

All dimensions in mm.

Ninigi

D A T A S H E E T

ZL201, ZL202 SERIES 2.54 MM (0.100") STRAIGHT PIN HEADER

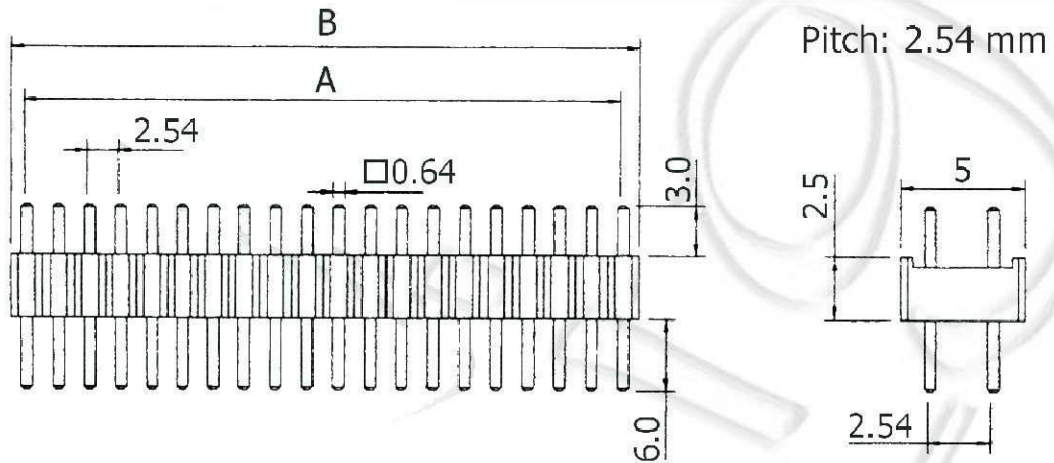

$$A = 2.54 * \left(\frac{N}{2} - 1\right)$$
$$B = 2.54 * \frac{N}{2}$$

All dimensions in mm.

ZL202