





HESTORE.HU


elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

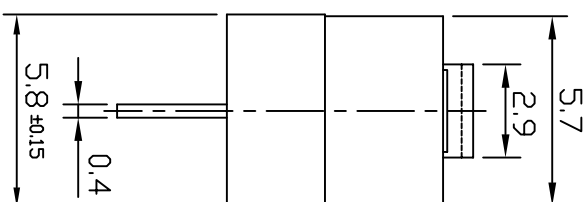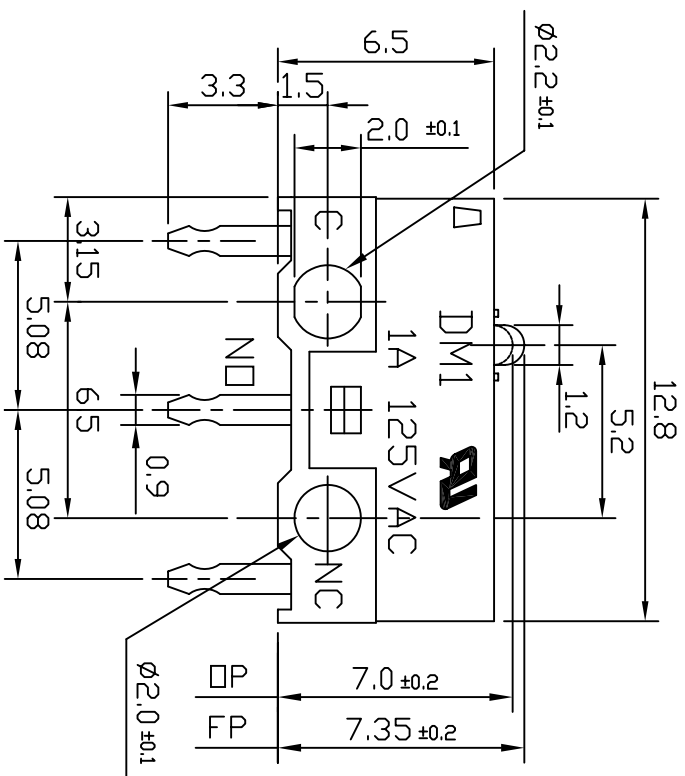

SCHEMATIC



Rating	AC125V 1A	Mechanical Life	500,000 cycles
Withstand Voltage	AC500V 1 minute	Electrical Life	30,000 cycles
Insulation Resistance	$\geq 100M\Omega$ DC500V	Ambient Temper.Used	-25°C to +65°C
Contact Resistance	$\leq 50m\Omega$	Ambient Humidity Used	Less than 85%RH
Soldering Temper.	245 \pm 5°C 3Sec.	Operating Force	110 \pm 30gf



REVISION	DESCRIPTION	REVISED BY	TOLERANCES X \pm 0.3	ANGLE $\frac{1}{2}^\circ$	UNIT	PART NAME	PART NO	DWG NO
△					mm	DM1 SPEC DRAWING	DM1-00P-110-3	S0235B
△			DRAWN BY 吳美玉	DESIGNED BY ERIC				
△			CHECKED BY 吳美玉	APPROVED BY 吳美玉				
△	2004.05.07 修改機械及電氣壽命							