



**HESTORE.HU**

elektronikai alkatrész áruház

**EN:** This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).

**Thermoelectric  
Cooler**



**STONECOLD** **PM-30X30-36**


**Performance Specifications**

Hot Side Temperature (°C)	25° C	50° C
Qmax (Watts)	34	37
Delta Tmax (°C)	66	75
I <sub>max</sub> (Amps)	3.3	3.3
V <sub>max</sub> (Volts)	14.0	16.1
Module Resistance (Ohms)	3.1	3.6



Performance curves on page 2

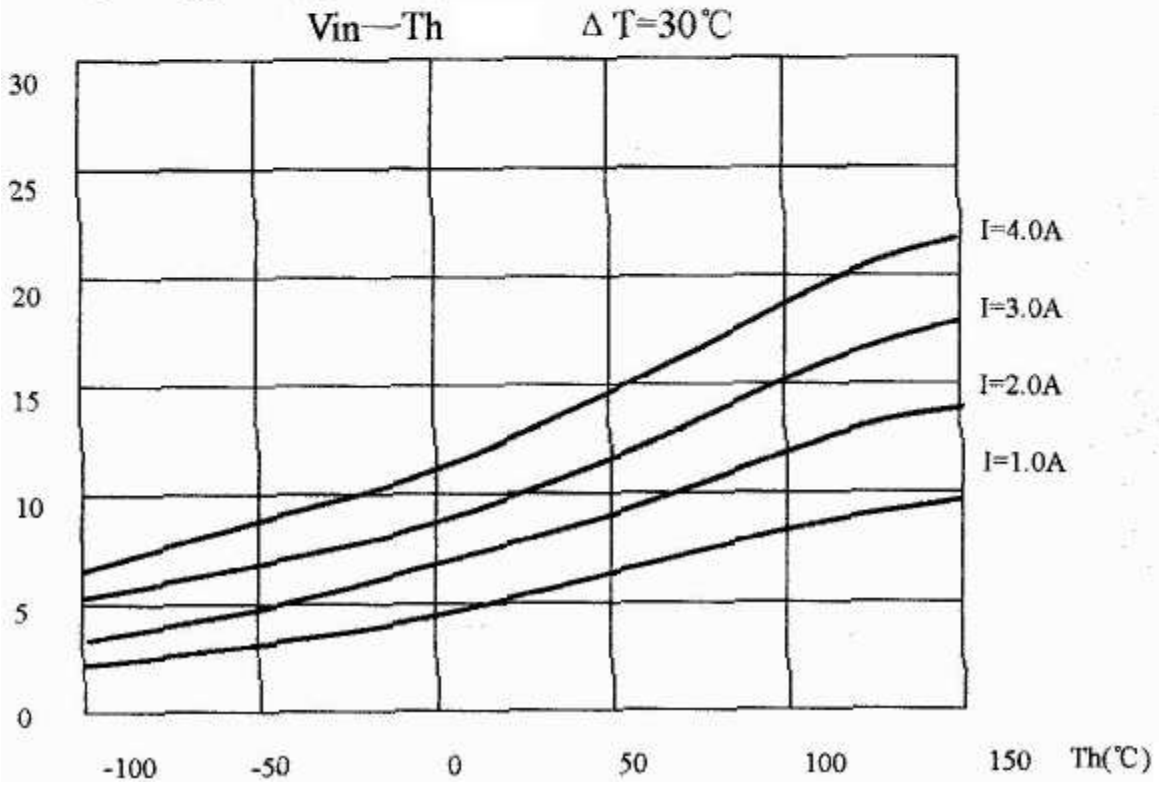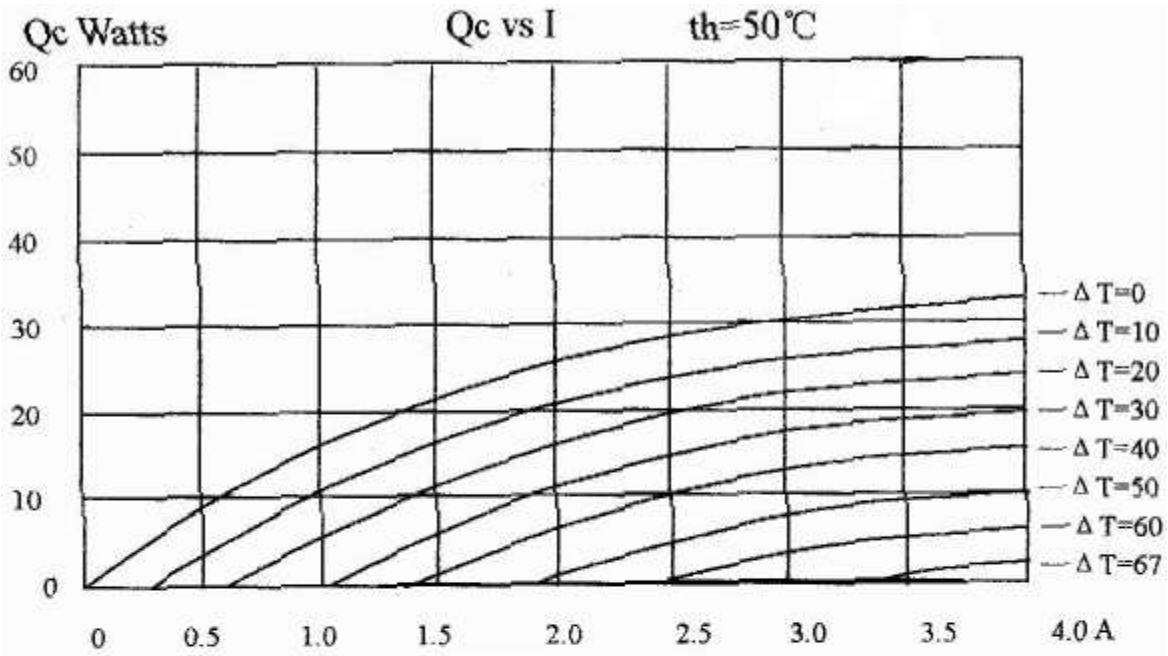

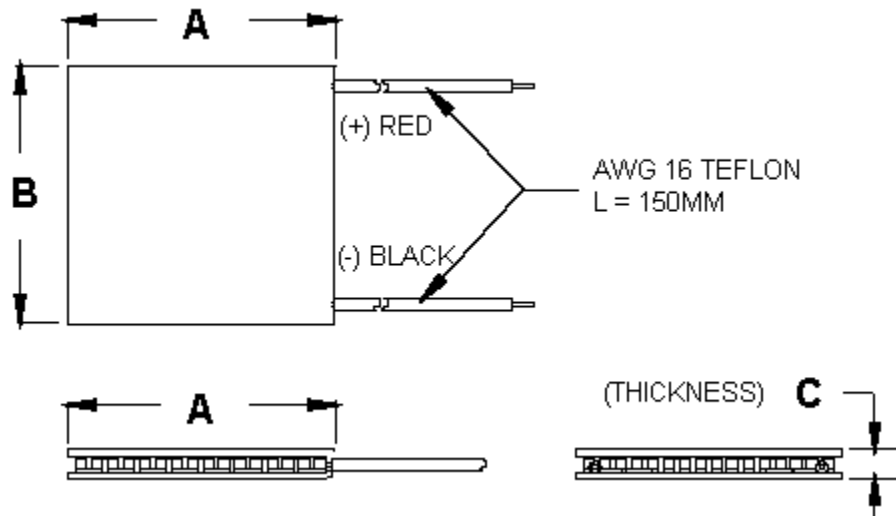

Ceramic Material: Alumina ( $Al_2O_3$ )  
 Solder Construction: 138°C, Bismuth Tin (BiSn)

**Size table:**

A	B	C
30	30	3.3

**Operating Tips**

- Max. Operating Temperature: 138°C
- Do not exceed  $I_{max}$  or  $V_{max}$  when operating module.
- Life expectancy: 200,000 hours
- Failure rate based on long time testings: 0.2%.