



HESTORE.HU

elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

434 MHz OOK AM Transmitter with Low Consumption

Pin-out

- 1) RF Output
- 2) Data Input
- 3) Ground
- 4) +V

2 dBm

TX-4MDIL

3 to 5v

SMALL dimensions

Information subject to change without notice

Description

Small dimension & low consumption OOK transmitter module with external antenna ideal for application when you need to modulate ON-OFF a RF carrier with digital signals.
D.I.L. Package.


In compliance with European Normative.

Descrizione

Modulo trasmettitore di piccolissime dimensioni e a bassissimo consumo realizzato su allumina. Trasmette alla frequenza di 433.92 MHz con modulazione OOK (On-Off Keying). Formato D.I.L.

In accordo con le Normative Europee.

Mechanical Dimensions

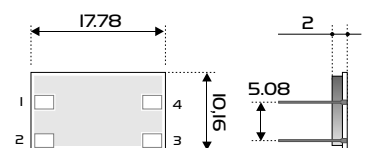

Technical Specification

Ta = 25 °C

CHARACTERISTICS		MIN	TYP	MAX	UNIT
V _s	Supply Voltage • Alimentazione	3		5	Vdc
I _s	Supply Current • Corrente assorbita	3		6	mA
F _c	Carrier frequency • Frequenza portante		433.92		MHz
P _o	€R.P. • Potenza di uscita €R.P.	-1		2	dBm
F _m	Square wave modulation • Frequenza di modulazione			4	KHz
V _i	Input logic level • Livello logico d'ingresso		V _s		V
T _{op}	Operating temperature range • Temperatura di lavoro	-20		+80	°C

Product Code: 650200738