




HESTORE.HU

elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

- In accordance with IEC 61246
- E cores with high permeability for common-mode chokes and broadband applications
- E cores are supplied as single units

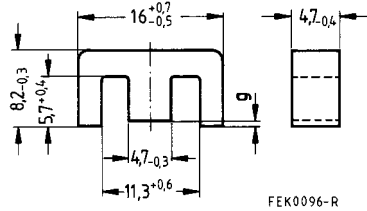

Magnetic characteristics (per set)

$\Sigma l/A = 1,87 \text{ mm}^{-1}$
 $l_e = 37,6 \text{ mm}$
 $A_e = 20,1 \text{ mm}^2$
 $A_{\min} = 19,4 \text{ mm}^2$
 $V_e = 756 \text{ mm}^3$

Approx. weight 3,6 g/set

Ungapped

Material	A_L -Wert nH	μ_e	$A_{L1\min}$ nH	P_V W/set	Ordering code
N30	1400 + 30/- 20 %	2080			B66307-G-X130
N27	950 + 30/- 20 %	1410	670	0,14 (200 mT, 25 kHz, 100 °C)	B66307-G-X127
N67	990 + 30/- 20 %	1470	670	0,45 (200 mT, 100 kHz, 100 °C)	B66307-G-X167
T42	5100 ± 30 %	7570			B66307-F-X142

Gapped

Material	g mm	A_L value approx. nH	μ_e	Ordering code
N27	0,06 ± 0,01	303	450	B66307-G60-X127
	0,10 ± 0,02	212	315	B66307-G100-X127
	0,50 ± 0,05	69	102	B66307-G500-X127

The A_L value in the table applies to a core set comprising one ungapped core (dimension $g = 0$) and one gapped core (dimension $g > 0$).

Calculation factors (see page 423 for formulas)

Material	Relationship between air gap – A_L value		Calculation of saturation current			
	$K1$ (25 °C)	$K2$ (25 °C)	$K3$ (25 °C)	$K4$ (25 °C)	$K3$ (100 °C)	$K4$ (100 °C)
N27	42,2	– 0,701	57,0	– 0,847	52,1	– 0,865
N67	42,2	– 0,701	55,9	– 0,820	51,8	– 0,881

Validity range: $K1, K2$: $0,05 \text{ mm} < s < 1,50 \text{ mm}$
 $K3, K4$: $30 \text{ nH} < A_L < 330 \text{ nH}$

Coil former (magnetic axis horizontal or vertical)

Material: GFR polyterephthalate (UL 94 V-0, insulation class to IEC 60085:
 $F \triangleq$ max. operating temperature 155 °C), color code black

Solderability: to IEC 60068-2-20, test Ta, method 1 (aging 3): 235 °C, 2 s

Resistance to soldering heat: to IEC 60068-2-20, test Tb, method 1B: 350 °C, 3,5 s

Winding: see page 159

Squared pins

Yoke

Material: Stainless spring steel (0,2 mm)

Coil former						Ordering code
Figure	Sections	A_N mm ²	I_N mm	A_R value $\mu\Omega$	Pins	
1	1	22,3	34	52,4	8	B66308-A1108-T1
2	1	22,3	34	52,4	8	B66308-J1108-T1
Yoke (ordering code per piece, 2 are required)						B66308-A2010

Figure 1, horizontal version


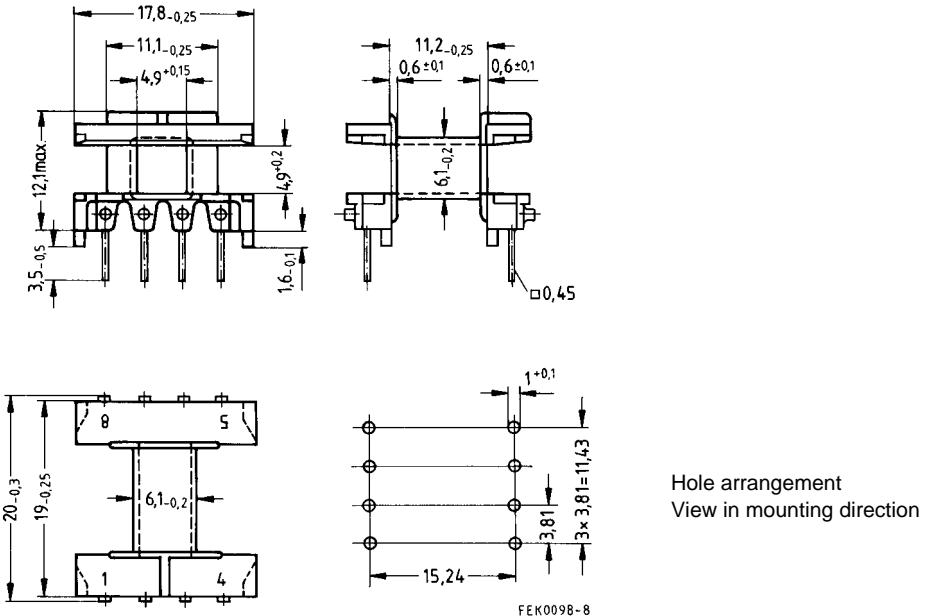


Figure 2, vertical version



Hole arrangement
View in mounting direction

Yoke

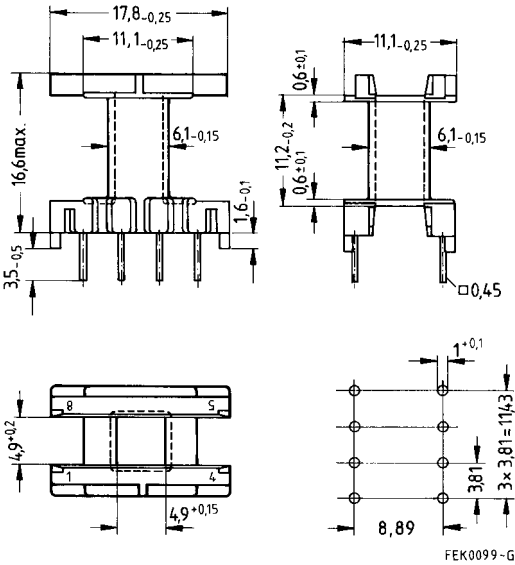